

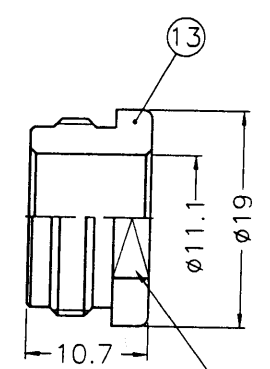


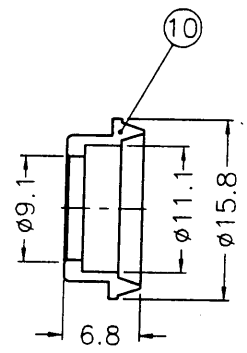



| REVISIONS | | |
|-----------|------|------------------------------|
| ISS | ZONE | DESCRIPTION\PER REQUEST\DATE |
| | | |

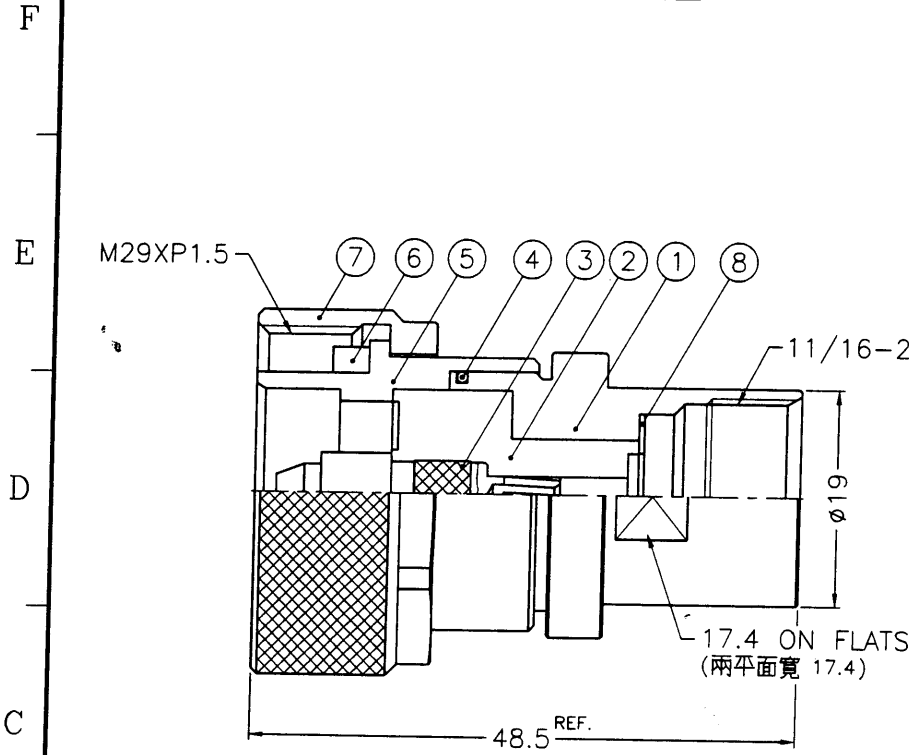

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



15.8 ON FLATS
(兩平面寬 15.8)

| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY | DRAWING NO. |
|-----|--------------|----------|---------|------|--------------------|
| 13 | NUT | | | 1 | B5201-12-19/111 |
| 12 | WASHER | | | 1 | WS-16/115X05 |
| 11 | GASKET | SILICONE | RED | 1 | B5201-10 |
| 10 | BRAID CLAMP | | | 1 | B5201-9-111/91 |
| 9 | CONTACT PIN | | | 1 | 7166511A1-6-305/26 |
| 8 | WASHER | | | 1 | WS-145/75X05 |
| 7 | SHELL | | | 1 | 7161141A1-7 |
| 6 | GASKET | SILICONE | RED | 1 | GS-25/205X35 |
| 5 | CONTACT BODY | | | 1 | 7161111A1-5 |
| 4 | GASKET | SILICONE | RED | 1 | GS-215/183XD16 |
| 3 | CONTACT PIN | | | 1 | 7161111A1-3 |
| 2 | INSULATOR | | NATURAL | 1 | 7161111A1-2T-214U |
| 1 | BODY | | | 1 | 7161141A1-1-214U |

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. ALBALOY PLATING (COPPER-TIN-ZINC ALLOY)
 4. BERYLLIUM COPPER PER QQ-C-530
 5. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
 6. TEFLON MIL-P-19468



DIMENSIONS ARE IN MILLIMETERS
 UNLESS OTHERWISE SPECIFIED TOLERANCES
 0.5-6 = ±0.2
 6-30 = ±0.4
 30-120 = ±0.6
 120-315 = ±1
 315-1000 = ±1.6
 1000-2000 = ±2.4

| PART NO. | |
|----------|----------------|
| APPROVED | DATE 12-02-99' |
| CHECKED | DATE 12-02-99' |
| DRAWN | DATE 12-02-99' |

| Amphenol - Kai Jack | |
|---------------------|--|
| TAINAN TAIWAN | |
| TITLE | 7/16 CLAMP PLUG (FOR RG-8/U, 2/3/U, 2/14/U) |
| DRAWING NO. | KJ-7161141A1-N/NTS-214U-50 |
| FILE NO. | F:\DWG\716\1141A1\214U-50\NNTS |