




1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.2 WAS CHANGED\RD-DM89011401B\01-14-00'



業務部

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

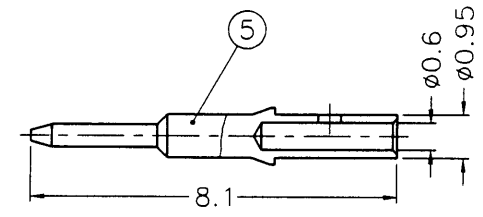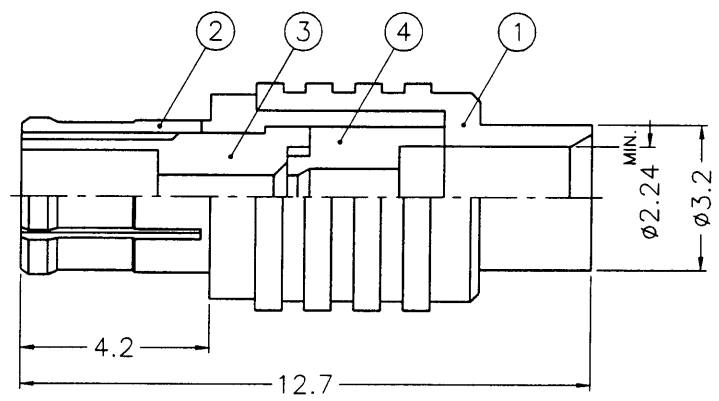

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. BERYLLIUM COPPER PER QQ-C-530
 4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

出圖
89.1.20
R & D

					DIMENSIONS ARE IN MILLIMETERS				PART NO.		Amphenol - Kai Jack				
					UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED		TAINAN TAIWAN				
5	CONTACT PIN	NOTE 1	NOTE 4	1	MCX1121A1-5-095/06	0.5-6 = ±0.2	6-30 = ±0.4	30-120 = ±0.6	120-315 = ±1	315-1000 = ±1.6	1000-2000 = ±2.4	DATE	01-18-00'	TITLE	MCX DIRECT SOLDER PLUG (FOR .085", .086")
4	INSULATOR	NOTE 5	NATURAL	1	MCX1181A1-4	CHECKED		DATE		01-18-00'		DRAWING NO.		KJ-MCX1181A1-3GT30G-.085-50	
3	INSULATOR	NOTE 5	NATURAL	1	MCX1121A1-3	DRAWN		DATE		01-18-00'		FILE NO.		F:\DWG\MCX\1181A1\085-50\3GT30G	
2	BODY	NOTE 3	NOTE 2	1	MCX1121A1-2-B	DATE		01-18-00'							
1	HOUSING	NOTE 1	NOTE 2	1	MCX1181A1-1-32/224										
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	B						

1 2 3 4 5 6 7 8

MUX Boss