




REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.5 WAS CHANGED\RD-DM88060701C\06-07-99'
C	A-1	NO.1 WAS CHANGED\RD-DM89061401I\06-14-00'
D	A-1	NO.2 WAS CHANGED\RD-DM89102301I\10-23-00'
		NO.3 WAS CHANGED\RD-DM90020101C\02-01-01'
		NO.1 WAS CHANGED\RD-DM90020602C\02-06-01'

業務部

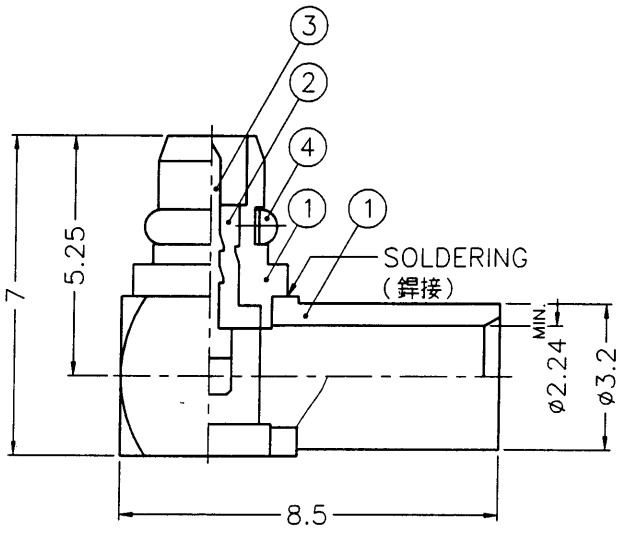

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. BERYLLIUM COPPER PER QQ-C-530
 5. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 6. TEFLON MIL-P-19468

出圖
 2001. 2. 13
 設計部

1. CONTACT PIN TO SOLDER

DIMENSIONS ARE IN MILLIMETERS				PART NO.		Amphenol - Kai Jack			
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED		TAINAN TAIWAN			
				DATE		TITLE			
				DATE		DRAWING NO.			
				DATE		FILE NO.			
5	COVER	NOTE 2	NOTE 3	1	CV-29X05-T	02-01-01'	MMCX R/A SEMI-RIGID PLUG (FOR .085" , .086")		
4	RETAINER RING	NOTE 4	NOTE 3	1	MMCX1121A1-5-C	02-01-01'	KJ-MMCX1182A1-3GT30G-.085-50		
3	CONTACT PIN	NOTE 1	NOTE 5	1	MMCX1112A1-4-B	02-01-01'	F:\DWG\MMCX\1182A1\085-50\3GT30G		
2	INSULATOR	NOTE 6	NATURAL	1	MMCX1112A1-3T-50-B				
1	HOUSING WITH BODY	NOTE 1	NOTE 3	1	MMCX1182A1-1S-32/224-B				
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	D