

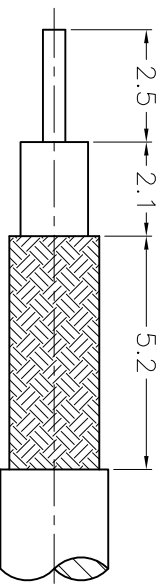
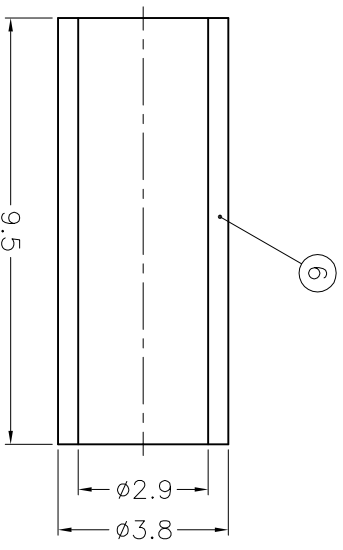


1	REVISIONS
2	DESCRIPTION \ PER REQUEST \ DATE
3	

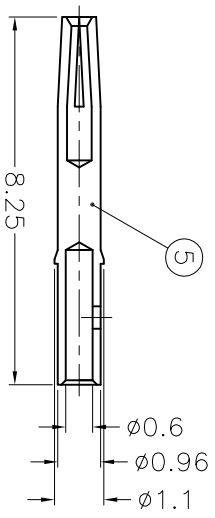

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

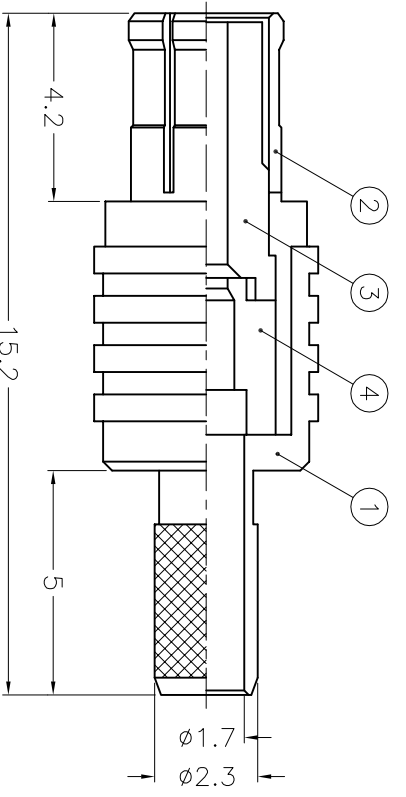

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. BERYLLIUM COPPER PER QQ-C-530
  3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
2. CONTACT PIN TO SOLDER

6	FERRULE	COPPER	NOTE 3	1	FR00AAE37A
5	CONTACT PIN	NOTE 2	NOTE 4	1	CP58AB02A
4	INSULATOR	NOTE 5	NATURAL	1	MCX1121A1-4
3	INSULATOR	NOTE 5	NATURAL	1	RMCX1121A1-3
2	BODY	NOTE 2	NOTE 3	1	MCX1121A1-2
1	HOUSING	NOTE 1	NOTE 3	1	MCX1121A1-1-23/17

DIMENSIONS ARE IN MILLIMETERS		PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	DATE
0.5-6	= ±0.2		07-04-02'
6-30	= ±0.4	CHECKED	DATE
30-120	= ±0.6		07-04-02'
120-315	= ±1	DRAWN	DATE
315-1000	= ±1.6		07-04-02'
1000-2000	= ±2.4		

TITLE		DRAWING NO.	
MCX REVERSE POLARITY CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U)		KJ-RMCX1121A1-NT30G-316U-50	
TAINAN TAIWAN		ITEM NO.	
		581121AAA36NC5F	

# Amphenol - Kai Jack

A

B

C

D

E

F

A

B

C

D

E

F