
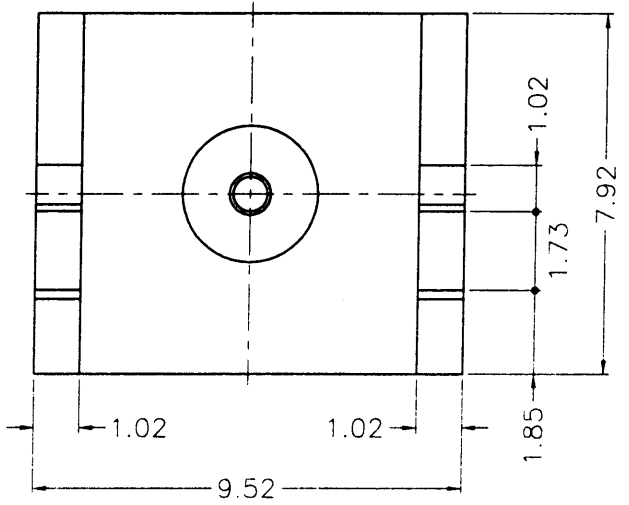


1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

SALES

STAKE IN 4 PLACES
EQUALLY SPACED 90° APART
(打四點 間隔 90°)
(SEE REMARK 1,2)

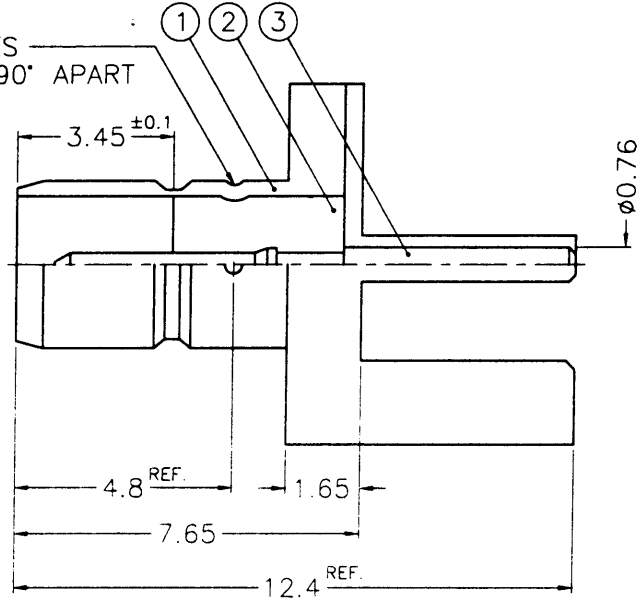

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468

- REMARK: 1. NO.2 MUST WITHSTAND A 4 lbs. MIN. PUSHOUT FORCE FROM NO.1 AFTER STAKING OPERATION
2. REMARK1 IS MAINTAINED BY STAMPING THE FOUR POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.1
- (1. 打四點後零件2由零件1推出至少必須承受4磅推力)
(2. 打四點後除需符合備註1要求外且不可擊穿零件1)

DIMENSIONS ARE IN MILLIMETERS				PART NO.		Amphenol - Kai Jack TAINAN TAIWAN	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE		
0.5-6 = ±0.2				<i>[Signature]</i>	06-11-02'	TITLE	
6-30 = ±0.4					CHECKED	DATE	MINI 75 OHM SMB END LAUNCH MINIRECEPT. JACK
30-120 = ±0.6				<i>[Signature]</i>	06-11-02'	DRAWING NO.	
120-315 = ±1					DRAWN	DATE	KJ-SMB1251A2-001-3GT30G-75
315-1000 = ±1.6				06-11-02'		ITEM NO.	
1000-2000 = ±2.4				FILE NO. F:\DWG\SMB\1251A2\001\75\3GT30G		121251AAC02GE7F	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
3	CONTACT PIN	NOTE 1	NATURAL	1	CP12ADD01A
2	INSULATOR	NOTE 4	NATURAL	1	NS00ATH01A
1	BODY	NOTE 1	NATURAL	1	BD12ABA01A

1 2 3 4 5 6 7/8 DR14675 8