





1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
C	A-3	NO.1 AND NO.5 WERE CHANGED\RD-DM91100901L\ 10-09-02'

SALES



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

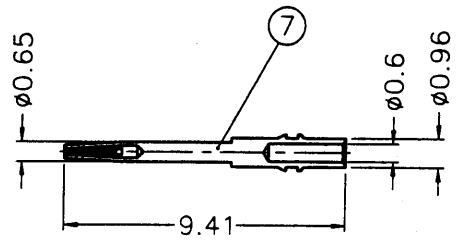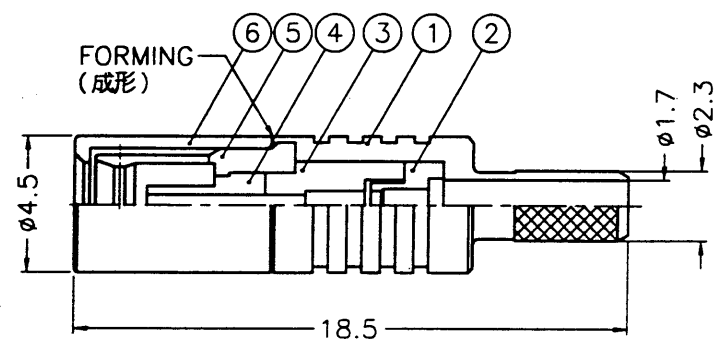

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-1946B
 - BERYLLIUM COPPER PER QQ-C-530

ISSUED
2002.10.11
R&D

- CRIMPED FERRULE
HEX CRIMP SIZE .128"
- CRIMPED CONTACT PIN TO SOLDER

8	FERRULE	COPPER	NOTE 2	1	FR-38/3X7C
7	CONTACT PIN	NOTE 5	NOTE 3	1	SSMB6121A1-6-096/06
6	SHELL	NOTE 1	NOTE 2	1	SSMB-SHELL-1
5	OUT CONTACT	NOTE 5	NOTE 2	1	TC15AAA01A
4	INSULATOR	NOTE 4	NATURAL	1	SSMB6121A1-2T-50-B
3	INSULATOR	NOTE 4	NATURAL	1	SSMB6121A1-3T-50
2	INSULATOR	NOTE 4	NATURAL	1	SSMB1121A1-3T-50
1	BODY	NOTE 1	NOTE 2	1	BD00AQS01A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVED	DATE
0.5-6	= ±0.2		<i>Loone</i>	10-09-02'
6-30	= ±0.4			
30-120	= ±0.6		CHECKED	DATE
120-315	= ±1		<i>Loone</i>	10-09-02'
315-1000	= ±1.6		DRAWN	DATE
1000-2000	= ±2.4		<i>Loone</i>	10-09-02'
SCALE	4/1	ISSUE	C	FILE NO. F:\DWG\SSMB\6121A1\316U-50\3GT30G

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	SSMB CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
DRAWING NO.	KJ-SSMB6121A1-3GT30G-316U-50
ITEM NO.	156121AAA36GE5F

F
E
D
C
B
A

F
E
D
C
B
A

1 2 3 4 5 6 7 8

7 RD-DR 15688 8