



ISS	ZONE	DESCRIPTION \ PER REQUEST \ DATE

REVISIONS

1 2 3 4 5 6 7 8



RECOMMENDED
CABLE STRIPPING DIM'S
(« OA3-e½u?0?o

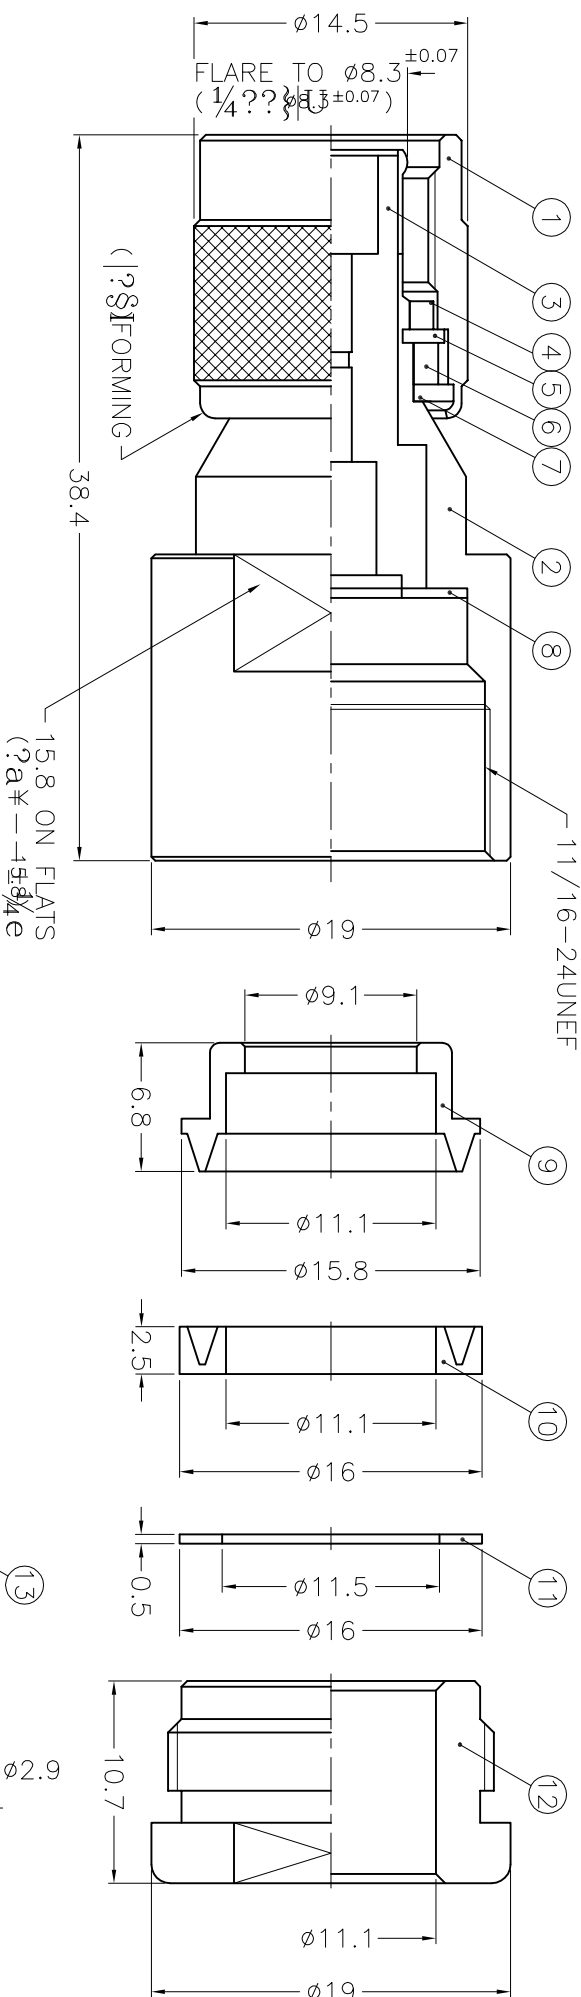

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

DIMENSIONS ARE IN MILLIMETERS
 UNLESS OTHERWISE SPECIFIED
 TOLERANCES

0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
13	CONTACT PIN	NOTE 1	NOTE 4	1	B5201-13-35/29
12	NUT	NOTE 1	NOTE 3	1	B5201-12-19/111
11	WASHER	NOTE 2	NOTE 3	1	WS-16/115X05
10	GASKET	SILICONE	RED	1	B5201-10
9	BRAID CLAMP	NOTE 1	NOTE 3	1	B5201-9-111/91
8	WASHER	NOTE 2	NOTE 3	1	WS-145/75X05
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	RING	DELIRIN	NATURAL	1	T50000-6-A
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-105/8X15
3	INSULATOR	NOTE 5	NATURAL	1	B5201-3T-50 -89913
2	BODY	NOTE 1	NOTE 3	1	B5201-2
1	SHELL	NOTE 1	NOTE 3	1	T50000-1-B

Amphenol - Kai Jack
 TAINAN TAIWAN

TITLE TNC CLAMP PLUG
 (FOR BELDEN 9913)

DRAWING NO. KJ-T1141A2-NT3G-9913-50
 FILE NO. F:\DWG\T\1141A2\9913-50\NT3G

1 2 3 4 5 6 7 8