



1 2 3 4 5 6 7 8



| REVISIONS | | |
|-----------|------|------------------------------|
| ISS | ZONE | DESCRIPTION\PER REQUEST\DATE |
| | | |

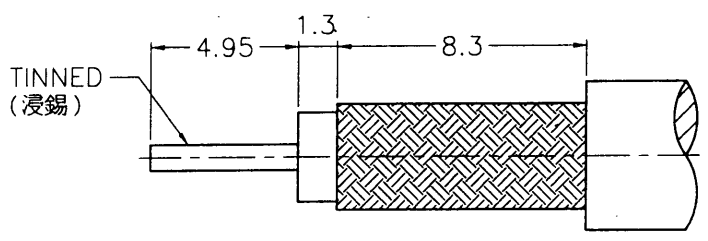


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

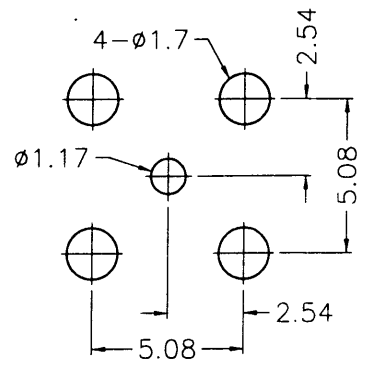

RECOMMENDED
MOUNTING HOLE
(建議架設孔)

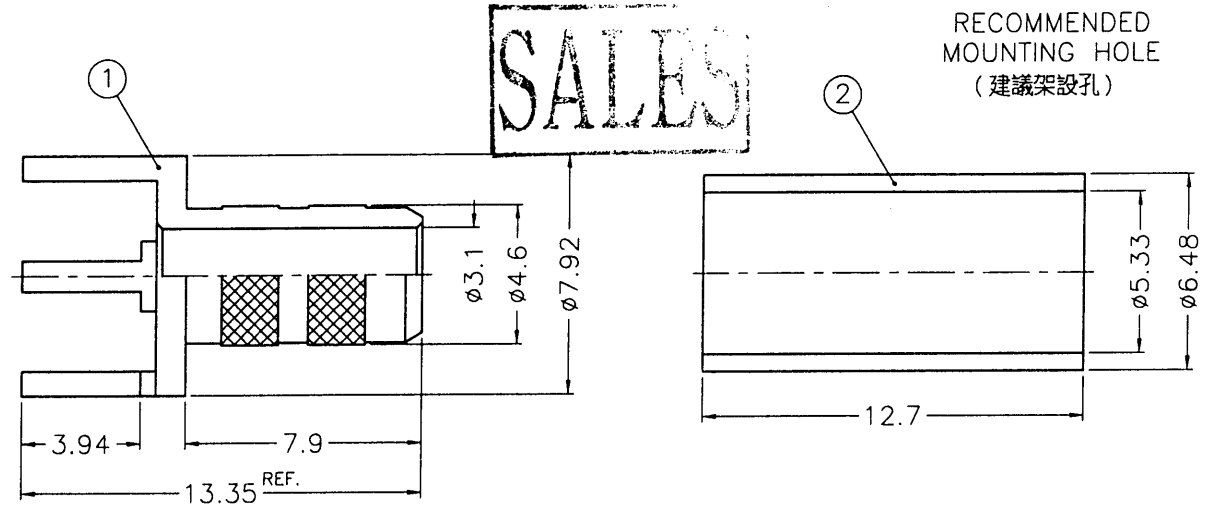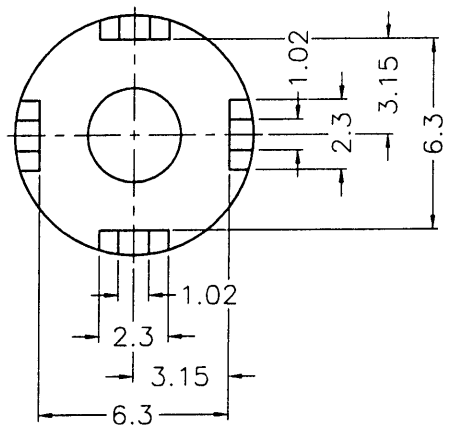

CONNEX



NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

| | |
|---------------------------------------|--------|
| DIMENSIONS ARE IN MILLIMETERS | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES | |
| 0.5-6 | = ±0.2 |
| 6-30 | = ±0.4 |
| 30-120 | = ±0.6 |
| 120-315 | = ±1 |
| 315-1000 | = ±1.6 |
| 1000-2000 | = ±2.4 |

| | | |
|----------|------------------------|----------------|
| PART NO. | 142197-N | |
| APPROVED | <i>Andy C</i> | DATE 11-24-03' |
| CHECKED | <i>Andy C</i> | DATE 11-24-03' |
| DRAWN | <i>Angela W</i> | DATE 11-24-03' |
| FILE NO. | F:\DWG\CONNEX\142197\N | |

| | |
|-----------------------------------------------------|--------------------------------|
| Amphenol | |
| Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China | |
| TITLE | SHIELDED CABLE PCB TERMINATION |
| DRAWING NO. | 142197-N |
| ITEM NO. | 142197-N |

| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY | DRAWING NO. |
|-----|-------------|----------|--------|------|------------------|
| 2 | FERRULE | COPPER | NOTE 2 | 1 | FR-648/533X 127C |
| 1 | BODY | NOTE 1 | NOTE 2 | 1 | BD22ABB01A |

A

1 2 3 4 5 6 7 RD-DR 19937 8