



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

業務部

- FERRULE CRIMPING TOOLS P/N (套管壓著工具)
227-944(M22520/5.01)
227-1221-19B
(M22520/5.19) HEX: 5.41 L=10.16
- INNER CONTACT CRIMPING TOOL P/N(內導體壓著工具)
413 SP 00 ADJUST TO 5(CABLE BT 3002 ADJUST TO 3)
- STRIPPING TOOL FOR L910/34(剝線工具)
SP 456 00
- PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE
(BM07800+BM20300)
(使用商業產品編號和日期碼袋包裝)
- CONNECTOR ACCORDING TO NFC 93-570
(連接器依據 NFC 93-570)







RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



RECOMMENDED
MOUNTING HOLE
(建議架設孔)

SCREW TORQUE 0.8 TO 1.2 N-m
RELEASE TORQUE 0.8 N-m MIN.
(旋緊扭力 0.8至1.2 N-m
鬆開扭力最小 0.8 N-m)

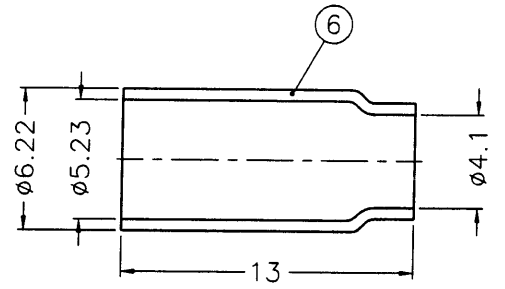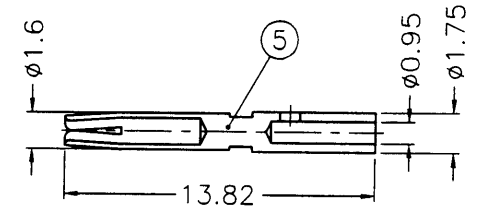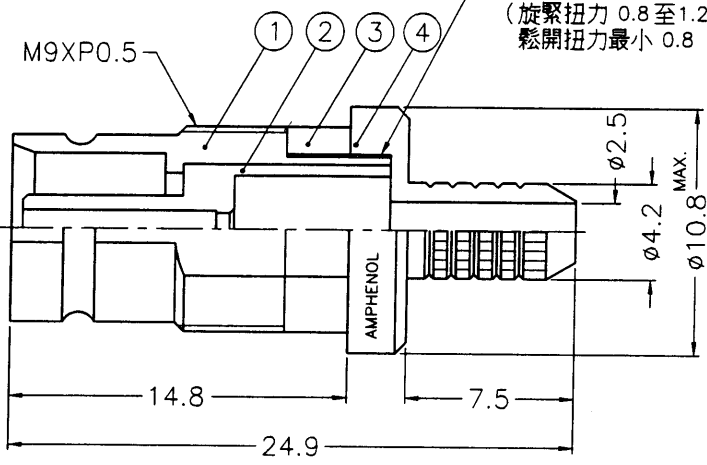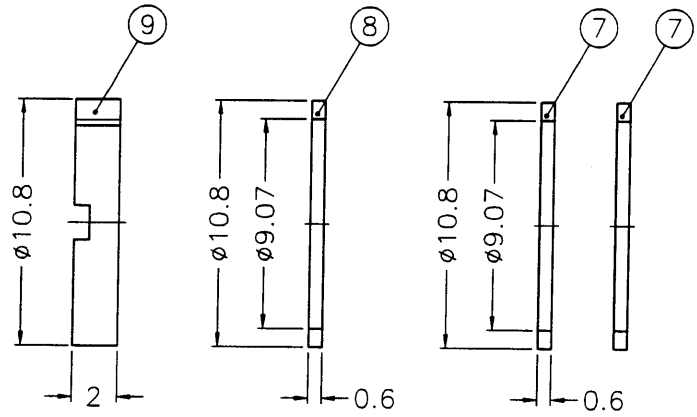

- PANEL THICKNESS:
(板厚)
- 1.2mm(GROUNDED OR ISOLATED)
 - 3mm(ONLY GROUNDED, WITHOUT WASHERS
⑦ AND ⑧)

CABLES: L910/34
L910/39
BT 3002
TR-SP.125
TR-SP.127
NORTELLRA 750-304541



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
9	NUT	BRASS	NICKEL	1	
8	WASHER	BRASS	NICKEL	1	
7	ISOLATING WASHER	EPOXY GLASS -FR4 TYPE	NATURAL	2	
6	FERRULE	COPPER	NICKEL	1	
5	CONTACT PIN	BEUC	GOLD	1	
4	BARREL	BRASS	NICKEL	1	
3	RING	PSU,20% G.F.	GREEN	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY	BRASS	GOLD	1	

DIMENSIONS ARE IN MILLIMETERS

PART NO.		156-931-34	
APPROVED	DATE	12-16-99'	
CHECKED	DATE	12-16-99'	
DRAWN	DATE	12-16-99'	

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE 1.6/5.6 75Ω BULKHEAD MOUNT JACK	
DRAWING NO.	
FILE NO. F:\DWG\ASF\156\931\34	

F
E
D
C
B
A

F
E
D
C
B
A

156-R0165