



1 2 3 4 5 6 7 8

REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
4	A-1	NO.6 WAS CHANGED\RD-DM88112901B\11-29-99'	




業務部

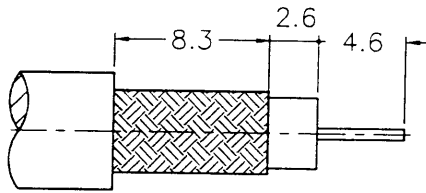

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)



1. CRIMPED FERRULE  
HEX CRIMP SIZE .255"

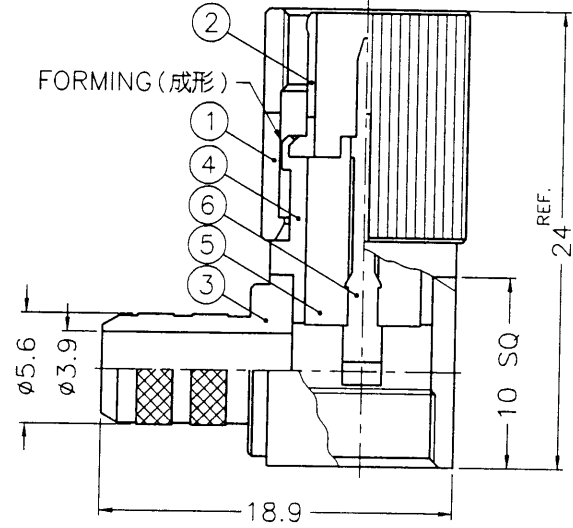

出圖  
2006.8.02

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - PHOSPHOR BRONZE PER QQ-B-750
  - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
9	NUT			1	15687061606-5
8	INSULATOR	DELTRIN	NATURAL	1	15687061606-4
7	FERRULE	COPPER	NOTE 2	1	FR-75/66X127
6	CONTACT PIN		NOTE 4	1	1561112A1-6-B
5	INSULATOR		NATURAL	1	1561112A1-5-B
4	OUTER BODY		NOTE 2	1	1561112A1-4
3	BODY		NOTE 2	1	1566412A1-2-56/39
2	OUTER CONTACT		NOTE 4	1	1561121G1-2
1	SHELL		NOTE 2	1	1561121G1-1-B

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES					
0.5-6 = ±0.2					
6-30 = ±0.4					
30-120 = ±0.6					
120-315 = ±1					
315-1000 = ±1.6					
1000-2000 = ±2.4					
APPROVED		DATE			
CHECKED		DATE			
DRAWN		DATE			

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	1.6-5.6 R/A CRIMP PLUG
DRAWING NO.	KJ-1561112A1-N/3GT3G-59U-75
FILE NO.	F:\DWG\156\1112A1\59U-75\N3GT3G

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8