





1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE


業務部

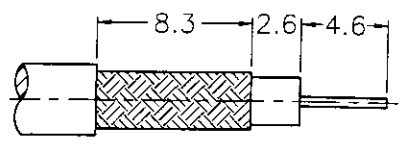

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

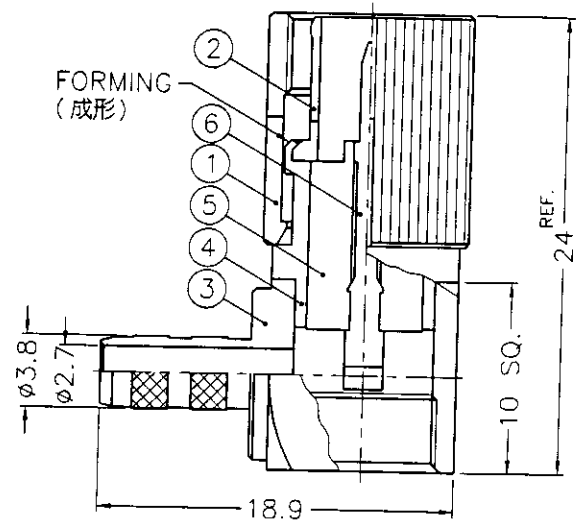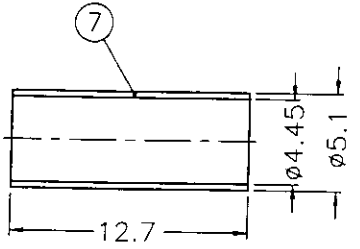

2001 3. 13  
設計部



- 1. CRIMPED FERRULE  
HEX CRIMP SIZE .178"
- 2. CONTACT PIN TO SOLDER

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 3. BERYLLIUM COPPER PER QQ-C-530  
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 5. TEFLON MIL-P-19468  
 6. JIS H 3250, C 2700

9	NUT	NOTE 1	NOTE 2	1	15687061606-5
8	INSULATOR	DELTRIN	NATURAL	1	15687061606-4
7	FERRULE	NOTE 6	NOTE 2	1	FR-51/445X127
6	CONTACT PIN	NOTE 1	NOTE 4	1	1561112A1-6-B
5	INSULATOR	NOTE 5	NATURAL	1	1561112A1-5-B
4	OUTER BODY	NOTE 1	NOTE 2	1	1561112A1-4
3	BODY	NOTE 1	NOTE 2	1	1566412A1-2-38 /27
2	OUTER CONTACT	NOTE 3	NOTE 4	1	1561121G1-2BE
1	SHELL	NOTE 1	NOTE 2	1	1561121G1-1-B

DIMENSIONS ARE IN MILLIMETERS  
 UNLESS OTHERWISE SPECIFIED TOLERANCES  
 0.5-6 = ±0.2  
 6-30 = ±0.4  
 30-120 = ±0.6  
 120-315 = ±1  
 315-1000 = ±1.6  
 1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 03-09-01'
CHECKED	DATE 03-09-01'
DRAWN	DATE 03-09-01'

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	1.6/5.6 R/A CRIMP PLUG
DRAWING NO.	KJ-1561112B1-N/3GT3G-2.5C2V-75
FILE NO.	F:\DWG\156\1112B1\25C2V-75\N3GT3G

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8 RD8DR11813