



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE




業務部



RECOMMENDED MOUNTING HOLE  
(建議架設孔)

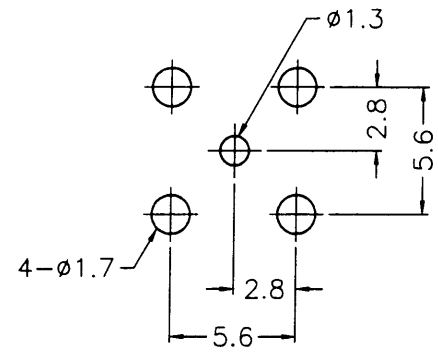

PCB MOUNTING HOLE  
(印刷電路板架設孔)

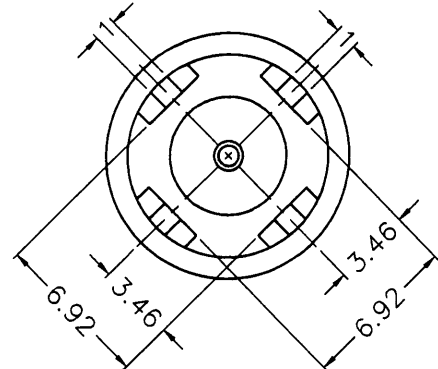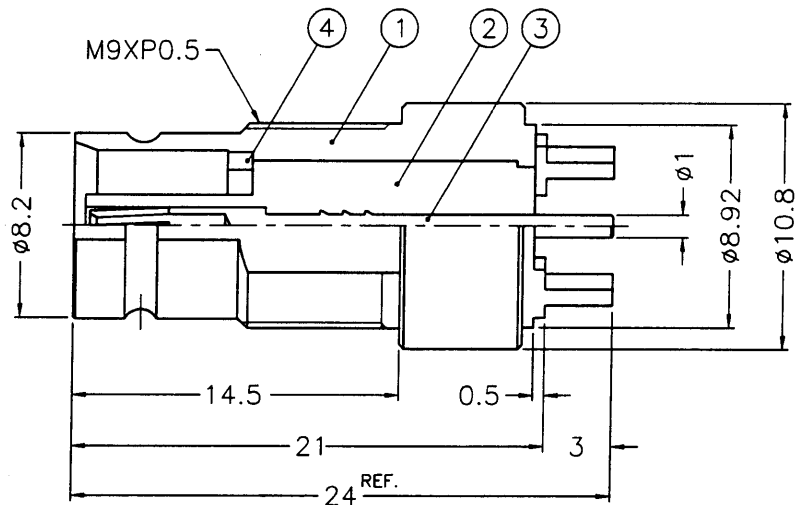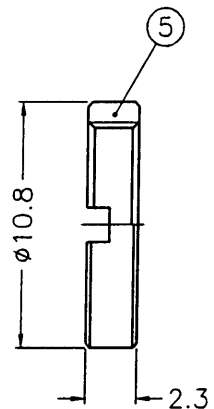

出圖  
89.7.18  
設計部

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 3. PHOSPHOR BRONZE PER QQ-B-750  
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 5. TEFLON MIL-P-19468

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

<b>Amphenol - Kai Jack</b>	
TAINAN TAIWAN	
TITLE	
1.6/5.6 P.C. MOUNT RECEPT. JACK	
DRAWING NO.	
KJ-1566251M1-N/3GT3G-75	
FILE NO.	
F:\DWG\156\6251M1\75\N3GT3G	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	NUT	NOTE 1	NOTE 2	1	RN108-9-05X23S
4	LOCK RING	NOTE 1	NOTE 4	1	S931-750-3
3	CONTACT PIN	NOTE 3	NOTE 4	1	1566251M1-3
2	INSULATOR	NOTE 5	NATURAL	1	1566251M1-2
1	BODY	NOTE 1	NOTE 4	1	1566251M1-1

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A

F  
E  
D  
C  
B  
A

F  
E  
I  
C  
E  
A