


- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  3. NICKEL PL. 150 MIN. THICK OVER COPPER PL. 300 MIN. THICK
  4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  5. PTFE (TEFLON MIL-P-19468)
  6. BERYLLIUM COPPER
  7. NICKEL PL. (100 MIN./160 MAX.) THICK OVER COPPER PL. (100 MIN./160 MAX.) THICK
  8. ZINC DIECAST
  9. BRASS PER QQ-B-613

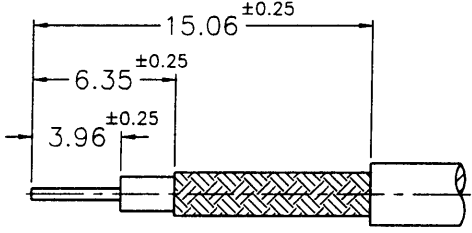

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

- REMARK: 1. MUST CONFORM TO AMPHENOL SPEC. 349-50551 SECTION 301 (必須符合 AMPHENOL 規格 349-50551 第 301 節)
2. NO.2 MUST WITHSTAND A 10 lbs. MIN. PUSHOUT FORCE APPLIED FROM THE BACK END OF THE CONNETOR. NO.2 LOCATION MUST CONFORM TO REMARK 1 BEFORE AND AFTER TEST. (零件 2 必須承受一個 10 磅從接頭後方的推力, 測試前後的位置必須能符合 REMARK 1)

10	FERRULE	COPPER	NOTE 7	1	2A-167-07
9	FERRULE	COPPER	NOTE 2	1	FR-752/663-648/559X127C
8	INSULATOR	NOTE 5	NATURAL	1	31-1099
7	CONTACT PIN	NOTE 1	NOTE 4	1	31-12576-2
6	SHELL	NOTE 8	NOTE 3	1	31-12407-2
5	WASHER	NOTE 9	NOTE 2	1	WS-128/9X08
4	SPRING	NOTE 6	NATURAL	1	B50000-6BEX025
3	GASKET	SILICONE	RED	1	GS-115/8X15S
2	INSULATOR	T.P.X.	WHITE	1	31-12575
1	BODY	NOTE 8	NOTE 3	1	31-12404-2
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

PART NO. <b>31-5900</b>	
APPROVED <i>Scott C</i>	DATE 09-20-00'
CHECKED <i>Scott</i>	DATE 09-20-00'
DRAWN <i>Scott</i>	DATE 09-20-00'

<b>Amphenol - Kai Jack</b> TAINAN TAIWAN	
TITLE BNC CRIMP PLUG (FOR RG-59,62 AND PLENUM 59,62 CABLE)	
DRAWING NO. <b>31-5900</b>	
FILE NO. F:\DWG\CNPD\31\5900	