

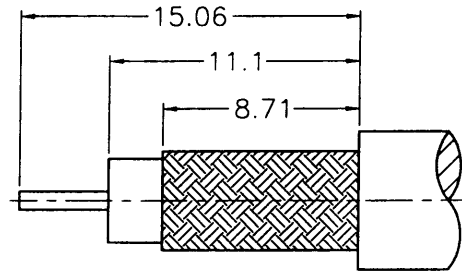


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A2	D-3	APPEARANCE WAS CHANGED\N/A\04-15-03'


SALES

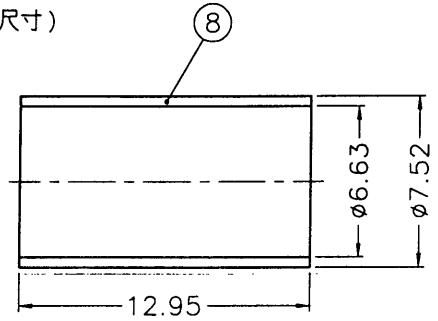

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

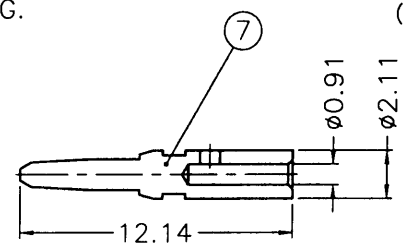

STAKE IN 6 PLACES.
DO NOT BREAK THRU
PLATING.
(打六點, 不可破壞電鍍)

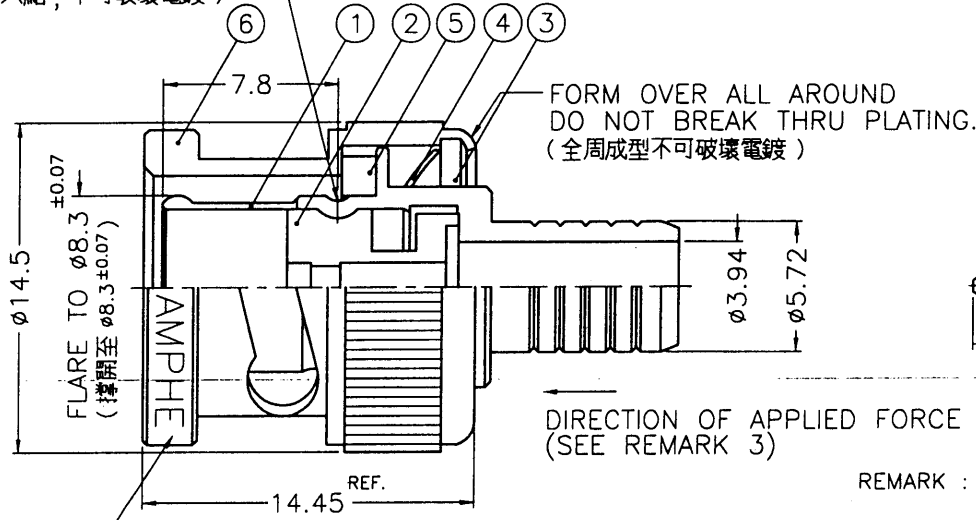

FORM OVER ALL AROUND
DO NOT BREAK THRU PLATING.
(全周成型不可破壞電鍍)

DIRECTION OF APPLIED FORCE
(SEE REMARK 3)

STAMP "AMPHENOL 31-71008-1000"
IN 1.2mm HIGH DEPRESSED CHARACTERS
(軋字 "AMPHENOL 31-71008-1000", 字高1.2mm)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. TEFLON PER MIL-P-19468
4. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
6. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

- REMARK :
1. WHEN CRIMPING CONTACT PIN TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-13, CAVITY 'B' (內導體壓著工具)
 2. WHEN CRIMPING FERRULE TO CABLE, CRIMP WITH AMPHENOL TOOL 227-944 (M22520/5-01) AND DIE SET 227-1221-13, CAVITY 'A' (M22520/5-13, CLOSURE 'A') (內導體壓著工具)
 3. INSULATOR SHALL WITHSTAND AN 12 LB AXIAL FORCE APPLIED IN DIRECTION SHOWN WITH NO EVIDENCE OF MOVEMENT. (絕緣體至少需承受 12 磅的圖示方向推出力量且不可移動)
 4. USE WITH BELDEN 1505A, 1426A, 9659, 9259, 9240, 8212, 9274, 9275, 9100 CABLES, AND CLARK CV7559 CABLES. (適用纜線)



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
8	FERRULE	COPPER	NOTE 4	1	31-1357-7
7	CONTACT PIN	NOTE 1	NOTE 6	1	31-12576-2
6	SHELL	NOTE 1	NOTE 4	1	31-1500-C
5	GASKET	SILICONE	RED	1	82-1535-3
4	SPRING	SK5	NOTE 5	1	B50000-6
3	WASHER	NOTE 2	NOTE 4	1	WS-12B/9X08
2	INSULATOR	NOTE 3	NATURAL	1	31-12756
1	BODY	NOTE 1	NOTE 4	1	31-12088-2

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE
FILE NO.	F:\DWG\CNPD\31\71008\1000-A2

Amphenol	
Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China	
TITLE BNC PLUG (75 OHM) FOR RG 59/U TYPE CABLE (0.81 CENTER CONDUCTOR)	
DRAWING NO.	31-71008-1000
ITEM NO.	31-71008-1000

7RD-DR 17945 8