



REVISIONS		
ISS	ZONE	DESCRIPTION\APPROVED\DATE

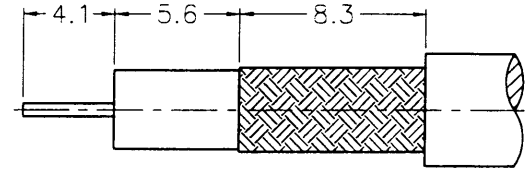

RECOMMENDED
CABLE STRIPPING DIM'S

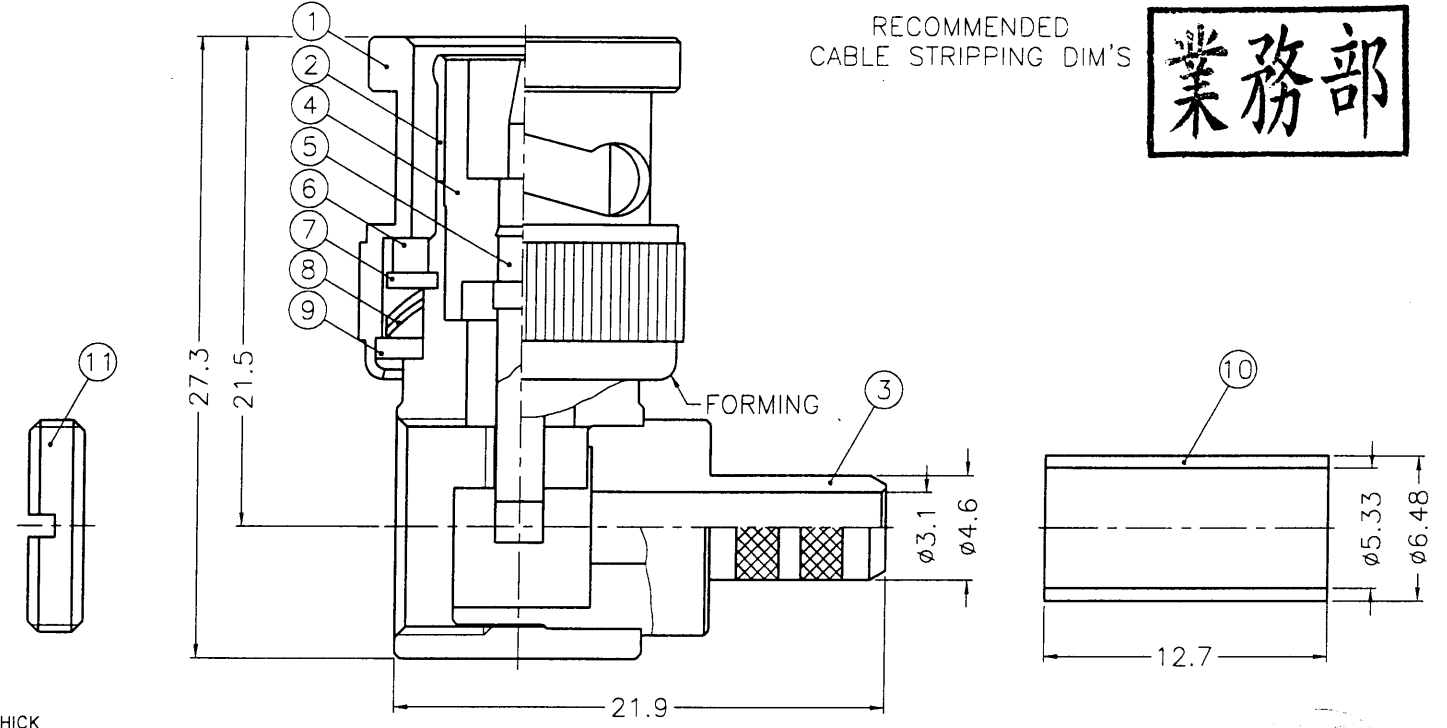

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

11	NUT	NOTE 1	NOTE 3	1	B5291-14
10	FERRULE	COPPER	NOTE 3	1	FR-648/533X 127C
9	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
8	SPRING	SK5	NOTE 4	2	B50000-6
7	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	CONTACT PIN	NOTE 1	NOTE 5	1	B5091-6-50
4	INSULATOR	DELTRIN	NATURAL	1	B50002-3-50
3	BARREL	NOTE 1	NOTE 3	1	B5091-3-46/31
2	HOUSING	NOTE 1	NOTE 3	1	B5091-2
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B

DIMENSIONS ARE IN MILLIMETERS
 UNLESS OTHERWISE SPECIFIED TOLERANCES
 0.5-6 = ±0.2
 6-30 = ±0.4
 30-120 = ±0.6
 120-315 = ±1
 315-1000 = ±1.6
 1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 07-09-98'
CHECKED	DATE 07-09-98'
DRAWN	DATE 07-09-98'

Mark C
Mark C
alex.H

KAI JACK INDUSTRIAL CO., LTD.
TAINAN TAIWAN R.O.C.

TITLE: BNC R/A CRIMP PLUG (FOR RG-58/U,58C/U)

DRAWING NO. KJ-B1112A1-ND3G-58U-50

FILE NO. F:\DWG\B\1112A1\58U-50\ND3G



F
E
D
C
B
A