



業務部

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

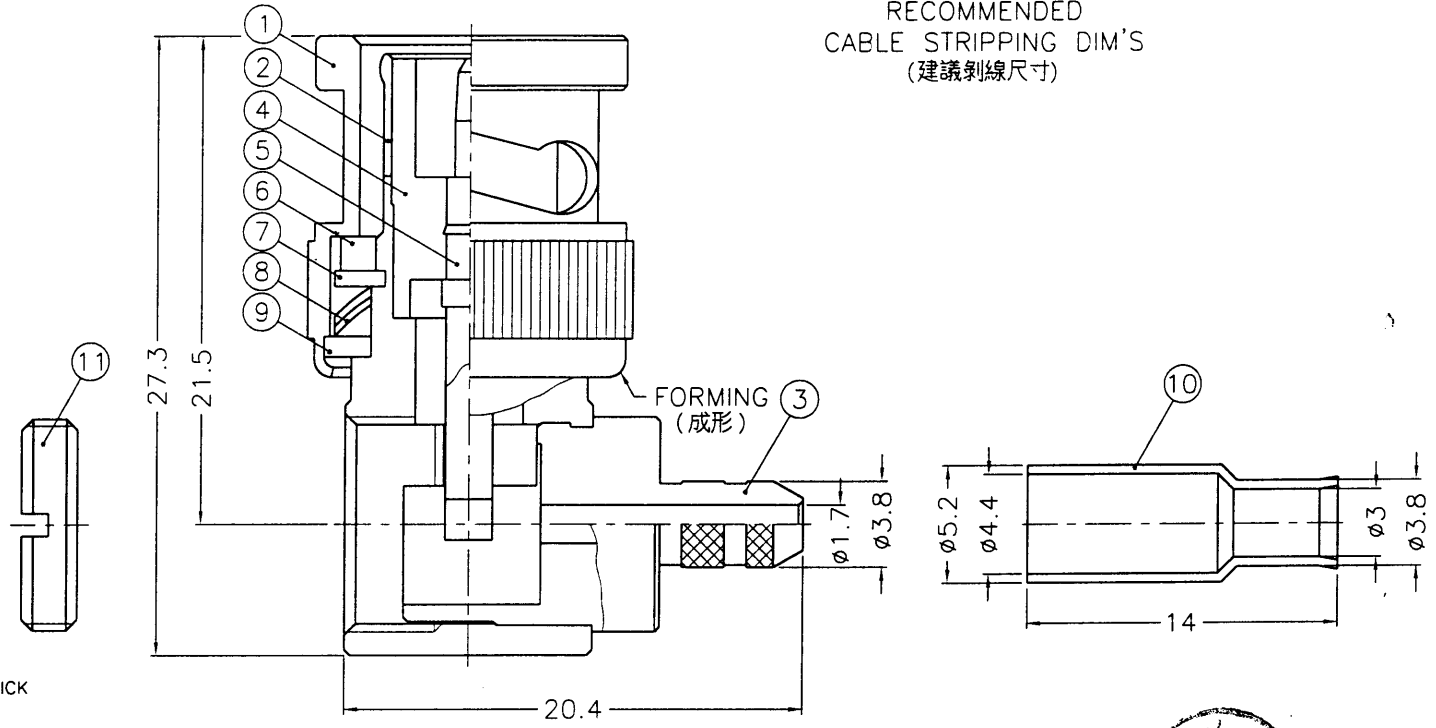

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. BRASS PER QQ-B-613  
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE  
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 6. JIS H 3260, C 3501

11	NUT	NOTE 1	NOTE 3	1	B5291-14
10	FERRULE	NOTE 6	NOTE 3	1	FR-52/44-38/3 X14
9	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
8	SPRING	SKS	NOTE 4	2	B50000-6
7	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	CONTACT PIN	NOTE 1	NOTE 5	1	B5091-6-50
4	INSULATOR	DELTRIN	NATURAL	1	B50002-3-50
3	BARREL	NOTE 1	NOTE 3	1	B5091-3-38/17
2	HOUSING	NOTE 1	NOTE 3	1	B5091-2
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.


DIMENSIONS ARE IN MILLIMETERS  
 UNLESS OTHERWISE SPECIFIED TOLERANCES  
 0.5-6 = ±0.2  
 6-30 = ±0.4  
 30-120 = ±0.6  
 120-315 = ±1  
 315-1000 = ±1.6  
 1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 08-17-99'
CHECKED	DATE 08-17-99'
DRAWN	DATE 08-17-99'



KAI JACK INDUSTRIAL CO., LTD.  
TAINAN TAIWAN R.O.C.

TITLE	BNC R/A CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
DRAWING NO.	KJ-B1112E1-ND3G-316U-50
FILE NO.	F:\DWG\B\1112E1\316U-50\ND3G



8875750