



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

業務部

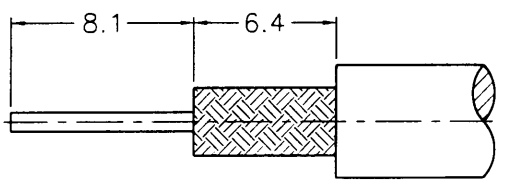

RECOMMENDED  
CABLE STRIPPING DIM'S

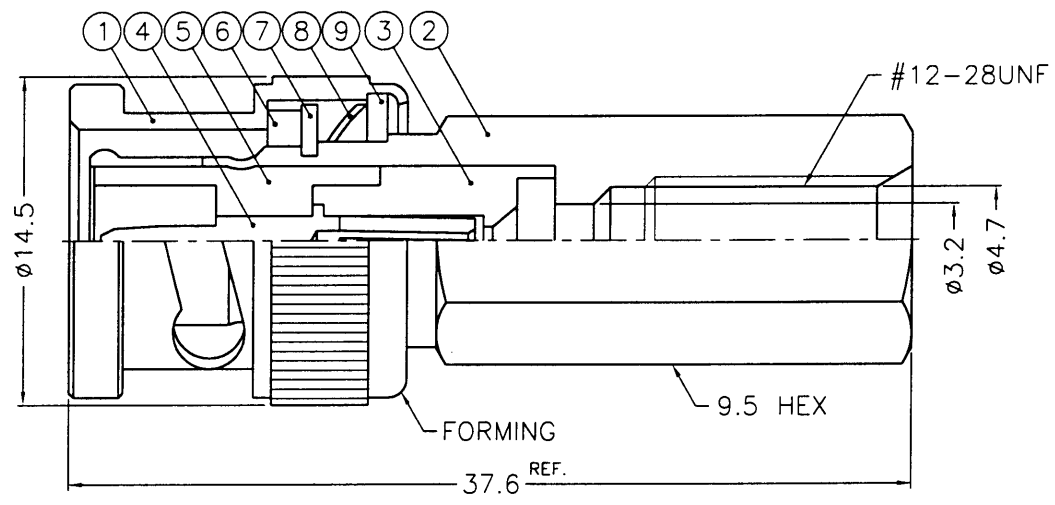

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. BRASS PER QQ-B-613  
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE  
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
9	WASHER			1	WS-128/9X08
8	SPRING			1	B50000-6
7	RETAINER RING			1	B50000-5
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	INSULATOR	DELTRIN	NATURAL	1	B5100-5-50
4	CONTACT PIN			1	B5100-4-21/09
3	INSULATOR	DELTRIN	NATURAL	1	B5100-3-50
2	HEX BODY			1	B5100-2-47/32
1	SHELL			1	B50000-1-B

DIMENSIONS ARE IN MILLIMETERS  
 UNLESS OTHERWISE SPECIFIED TOLERANCES  
 0.5-6 = ±0.2  
 6-30 = ±0.4  
 30-120 = ±0.6  
 120-315 = ±1  
 315-1000 = ±1.6  
 1000-2000 = ±2.4

PART NO.  
 APPROVED *Mark C* DATE 05-03-99'  
 CHECKED *Mark C* DATE 05-03-99'  
 DRAWN *Ada* DATE 05-03-99'

**KAI JACK INDUSTRIAL CO., LTD.**  
 TAINAN TAIWAN R.O.C.  
 TITLE: BNC TWIST-ON PLUG  
 DRAWING NO.: KJ-B1131A1-ND3G-58U-50  
 FILE NO.: F:\DWG\B\1131A1\58U-50\ND3G

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
E  
A

88R415