


ISS	ZONE	DESCRIPTION\PER REQUEST\DATE


REVISIONS

1 2 3 4 5 6 7 8



RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

1. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .1"

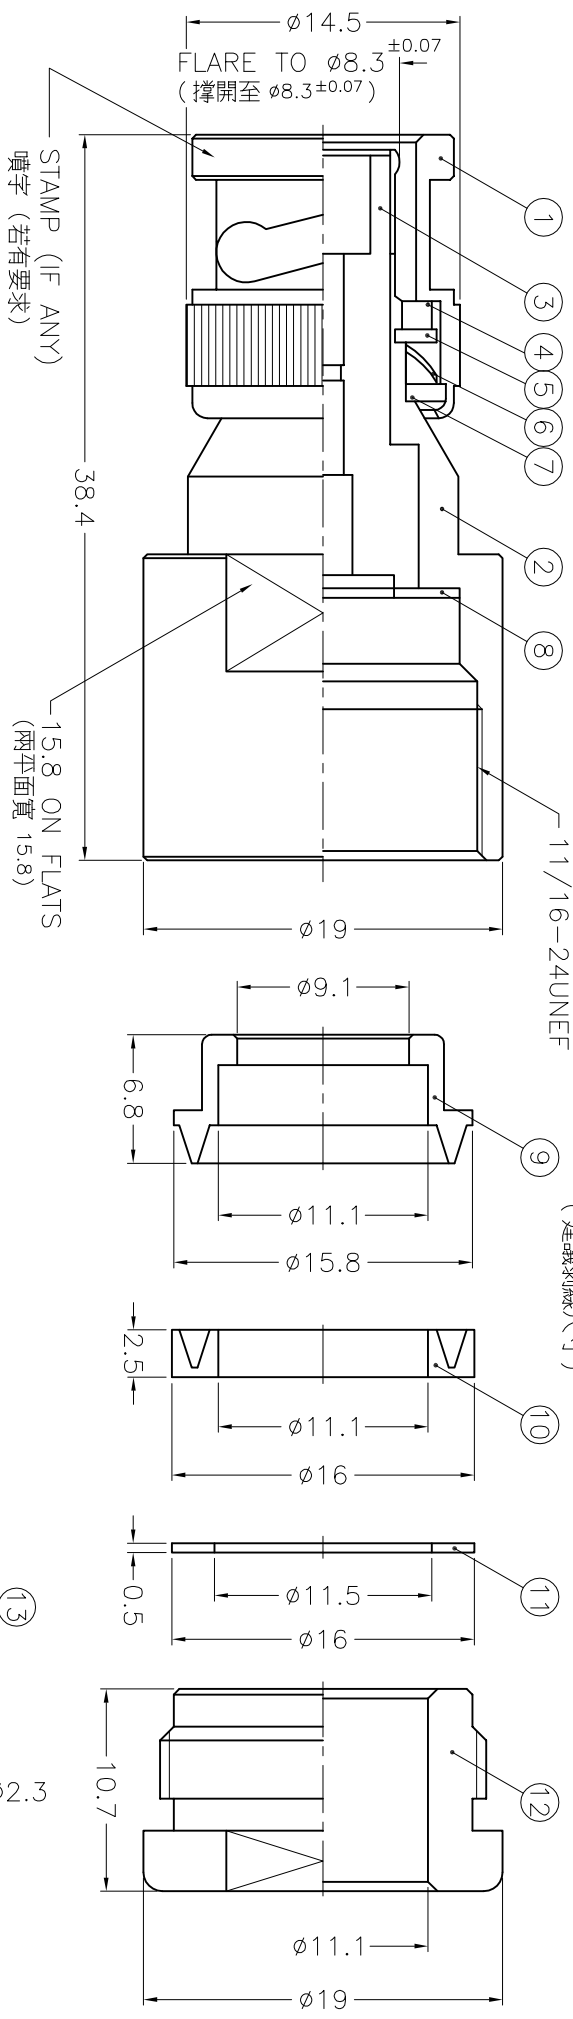

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN.
4. NICKEL PL. 200 MIN. OVER COPPER PL. 50 MIN.
5. GOLD PL. 3 MIN. OVER NICKEL PL. 50 MIN.
6. TEFLON MIL-P-19468

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED

TOLERANCES

- 0.5-6 = ±0.2
- 6-30 = ±0.4
- 30-120 = ±0.6
- 120-315 = ±1
- 315-1000 = ±1.6
- 1000-2000 = ±2.4

PART NO.

APPROVED

CHECKED

DRAWN

DATE

DATE

DATE

**Amphenol**

Danbury, CT, USA - Taiwan, Taiwan - Shenzhen, China

TITLE

BNC CLAMP PLUG

DRAWING NO.

B1141A2-NT3G-214U-50

ITEM NO.

01141AAE24NA5F

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
13	CONTACT PIN	NOTE 1	NOTE 5	1	B5201-13-3/23
12	NUT	NOTE 1	NOTE 3	1	B5201-12-19/111
11	WASHER	NOTE 2	NOTE 3	1	WS-16/115X05
10	GASKET	SILICONE	RED	1	B5201-10
9	BRAID CLAMP	NOTE 1	NOTE 3	1	B5201-9-111/91
8	WASHER	NOTE 2	NOTE 3	1	WS-145/75X05
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	SPRING	SK5	NOTE 4	1	B50000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-115/8X15
3	INSULATOR	NOTE 6	NATURAL	1	B5201-3T-50
2	BODY	NOTE 1	NOTE 3	1	B5201-2
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B

1 2 3 4 5 6 7 8