


1 2 3 4 5 6 7 8


| REVISIONS | | |
|-----------|------|------------------------------|
| ISS | ZONE | DESCRIPTION\PER REQUEST\DATE |
| | | |

業務部

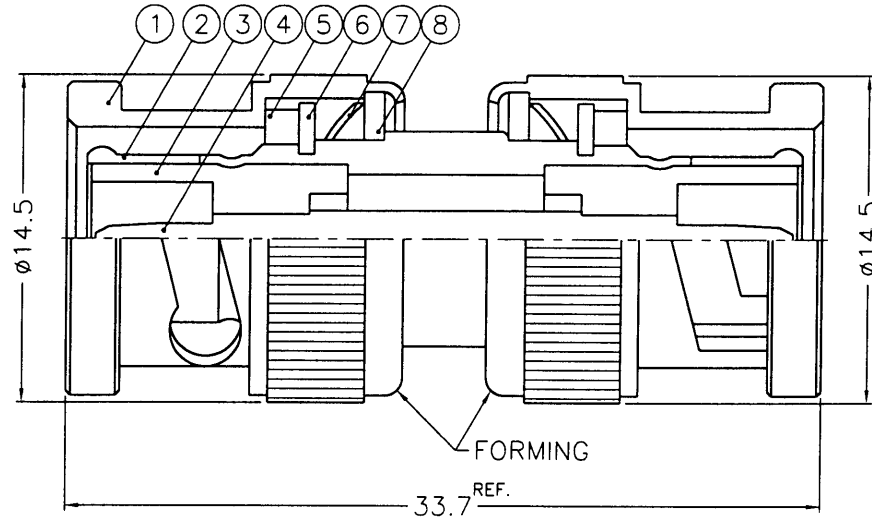

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)


1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE



| 8 | WASHER | NOTE 2 | NOTE 3 | 2 | WS-128/9X08 |
|-----|---------------|----------|---------|------|-------------|
| 7 | SPRING | SK5 | NOTE 4 | 2 | B50000-6 |
| 6 | RETAINER RING | NOTE 1 | NOTE 3 | 2 | B50000-5 |
| 5 | GASKET | RUBBER | RED | 2 | GS-115/8X15 |
| 4 | CONTACT PIN | NOTE 1 | NOTE 5 | 1 | B5900-5 |
| 3 | INSULATOR | DELTRIN | NATURAL | 2 | B50002-3-50 |
| 2 | BODY | NOTE 1 | NOTE 3 | 1 | B5900-2 |
| 1 | SHELL | NOTE 1 | NOTE 3 | 2 | B50000-1-B |
| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY | DRAWING NO. |

| DIMENSIONS ARE IN MILLIMETERS | | | |
|---------------------------------------|-----|-------|---|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | |
| 0.5-6 | = | ±0.2 | |
| 6-30 | = | ±0.4 | |
| 30-120 | = | ±0.6 | |
| 120-315 | = | ±1 | |
| 315-1000 | = | ±1.6 | |
| 1000-2000 | = | ±2.4 | |
| SCALE | 3/1 | ISSUE | A |

| PART NO. | |
|----------|------------------------------|
| APPROVED | <i>Mark C</i> DATE 05-05-99' |
| CHECKED | <i>Mark C</i> DATE 05-05-99' |
| DRAWN | <i>Ada</i> DATE 05-05-99' |

| | | |
|---|-------------|------------------------------|
|  KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C. | TITLE | BNC MALE TO BNC MALE ADAPTOR |
| | DRAWING NO. | KJ-B2071A2-ND3G-50 |
| | FILE NO. | F:\DWG\B\2071A2\50\ND3G |

A

A

1 2 3 4 5 6 7 8

8807R056/