


ISS ZONE	DESCRIPTION\PER REQUEST\DATE
1	REVISIONS
2	
3	

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- BRASS PER QQ-B-626
- BRASS PER QQ-B-613
- NICKEL PL. 100 MIN. THICK OVER COPPER PL. 300 MIN. THICK
- NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
- PHOSPHOR BRONZE PER QQ-B-750
- GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- TEFLON MIL-P-19468
- ZINC DIECAST

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
1	SHELL	NOTE 9	NOTE 3	3	B50000Z-1
2	BODY	NOTE 1	NOTE 4	2	B207600-32-2
3	HOUSING	NOTE 1	NOTE 4	1	S38-4082-75-3
4	INSULATOR	DELRI	NATURAL	2	B5091-5-75-B
5	CONTACT PIN	NOTE 1	NOTE 7	1	B5091-6-75-B
6	GASKET	RUBBER	RED	2	GS-115/8X115
7	RETAINER RING	NOTE 1	NOTE 4	2	B50000-5
8	SPRING	SK5	NOTE 5	2	B50000-6
9	WASHER	NOTE 2	NOTE 4	2	WS-128/9X08
10	CONTACT PIN	NOTE 1	NOTE 7	1	S384-08075-10
11	INSULATOR	DELRI	NATURAL	1	B7200-4-50
12	INSULATOR	DELRI	NATURAL	1	B7200-2-75
13	BODY	NOTE 1	NOTE 4	1	S38-4082-75-13
14	CONTACT PIN	NOTE 6	NOTE 7	1	B6141A1-3-21/06
15	COVER	NOTE 2	NOTE 4	2	CV-895X07-1
16	RESISTOR	75R	0.125W	1	RS-75R-0.125W-1%
17	LOCK RING	NOTE 1	NOTE 4	1	B5071A1-4
18	CONTACT PIN	NOTE 1	NOTE 7	1	S38-4082-75-18
19	INSULATOR	NOTE 8	NATURAL	1	B207600-32-10
20	RIVET	NOTE 1	NOTE 4	1	RV00AAA01B
21	GASKET	SILICONE	RED	1	GS-12X4
22	WASHER	NOTE 2	NOTE 4	1	WS-128/31X08
23	CHAIN	NOTE 1	NOTE 4	1	B500-4X100
24	RIVET	NOTE 1	NOTE 4	1	B500-5

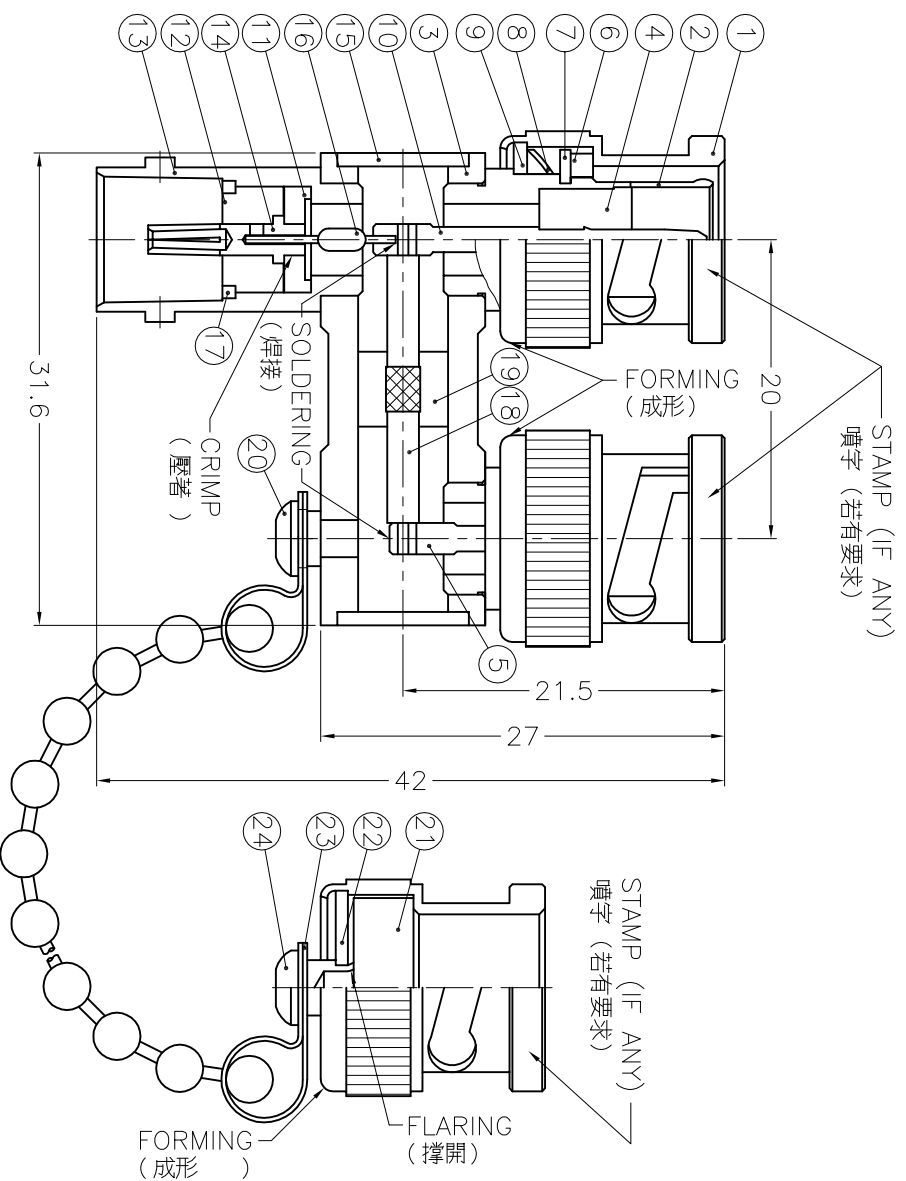

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	DATE	08-29-03'
APPROVED	DATE	08-29-03'
CHECKED	DATE	08-29-03'
DRAWN	DATE	08-29-03'

Danbury, CT, USA - Taiwan, Taiwan - Shenzhen, China

Amphenol

BNC MALE TO FEMALE TO MALE ADAPTOR

DRAWING NO. B4070A5-ND3G-75

FILE NO. F:\DWG\B\4070A5\75\ND3G

ITEM NO.

1 2 3 4 5 6 7 8

A B C D E F A B C D E F A