


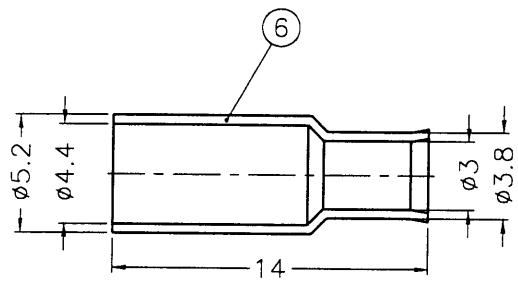
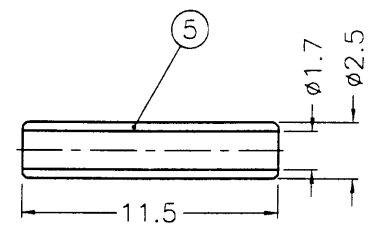


REVISIONS			
ISS	ZONE	DESCRIPTION	APPROVED\DATE

業務部

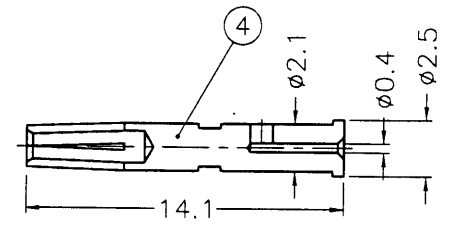

RECOMMENDED
CABLE STRIPPING DIM'S

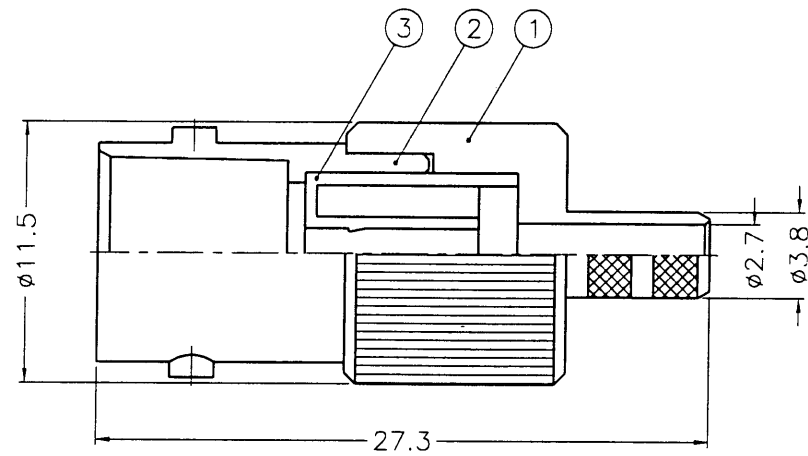

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - PHOSPHOR BRONZE PER QQ-B-750
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - JIS H 3260, C 3501

出圖
87.11.03
R&D

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	FERRULE	NOTE 5	NOTE 2	1	FR-52/44-38/3 X14
5	SLEEVE	DELTRIN	NATURAL	1	SL-25/17X115
4	CONTACT PIN	NOTE 3	NOTE 4	1	B74000-8-25/04
3	INSULATOR	DELTRIN	NATURAL	1	B74050-3-75-B
2	BODY	NOTE 1	NOTE 2	1	B74000-2
1	HOUSING	NOTE 1	NOTE 2	1	B70002-1-38/27

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	
APPROVED	DATE 10-31-98'
CHECKED	DATE 10-31-98'
DRAWN	DATE 10-31-98'

	KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.
TITLE	BNC CRIMP JACK
DRAWING NO.	KJ-B6121E1-ND3G-179U-75
FILE NO.	F:\DWG\B\6121E1\179U-75\ND3G