
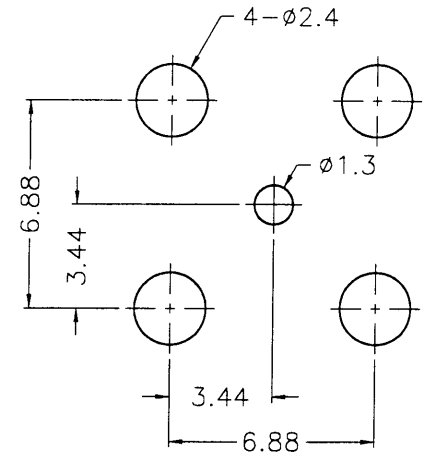
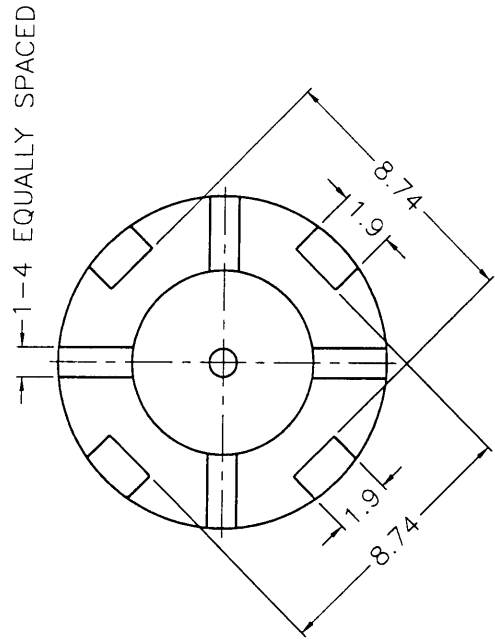


業務部

REVISIONS		
ISS	ZONE	DESCRIPTION\APPROVED\DATE
B	B-5	ADDED TWO USERS\TONY. T\02-18-94'
C	A-1	NO.1 WAS CHANGED\TONY. T\08-05-96'

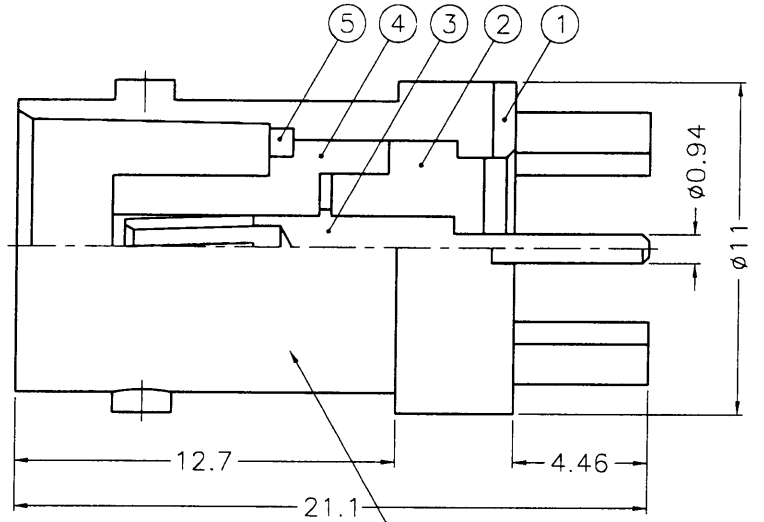

STAMP "AMPHENOL RFX"
EXCEPT AMPHENOL\ASF

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - BRASS PER QQ-B-613
 - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - PHOSPHOR BRONZE PER QQ-B-750
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

出圖
87.3.31
R&D

AMPHENOL\ASF\CNPD

DIMENSIONS ARE IN MILLIMETERS					PART NO.		Amphenol - Kai Jack	
UNLESS OTHERWISE SPECIFIED TOLERANCES					31-5329-52RFX		TAINAN TAIWAN	
0.5-6 = ±0.2					APPROVED <i>Tony T</i> DATE 03-25-98'		TITLE	
6-30 = ±0.4					CHECKED <i>Golden W</i> DATE 03-25-98'		BNC P.C. MOUNT RECEPT. JACK	
30-120 = ±0.6					DRAWN <i>Trang G</i> DATE 03-25-98'		DRAWING NO.	
120-315 = ±1							KJ-B6251D1-50	
315-1000 = ±1.6							FILE NO.	
1000-2000 = ±2.4							F:\DWG\APL\CNPD\RFX\31\5329\52\00	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	LOCK RING	NOTE 2	NOTE 3	1	B7700-4
4	INSULATOR	PBT	WHITE	1	B7703-4-50
3	CONTACT PIN	NOTE 4	NOTE 5	1	B7703-3
2	INSULATOR	PBT	WHITE	1	B7703-2-50
1	BODY	NOTE 1	NOTE 3	1	B7703-1-A

A

A