


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
D	A-1	NO.1 WAS CHANGED\RD-DM90122701Y\12-27-01'	
	E-2	ADDED 90°±3'\RD-DM90122701Y\12-27-01'	
	F-4	ADDED TEXT\RD-DM90122701Y\12-27-01'	
E	A-3	NO.5 WAS CHANGED\RD-DM91100801W\10-09-02'	
F	A-3	NO.1 WAS CHANGED\RD-DM9112201W\11-22-02'	

REMARK : 1. NO.2 MUST WITHSTAND A 2 LB PUSHOUT AT ZERO DEGREE CENTIGRADE.  
 (在攝氏零度, 零件2須能承受2磅的推出力量)  
 2. FLAT TO BE LOCKTED 90°±3' IN RELATION TO Ø1.98 STUDS AS SHOWN.  
 (平面與Ø1.98銷子的關係是90°±3')

**SALES**

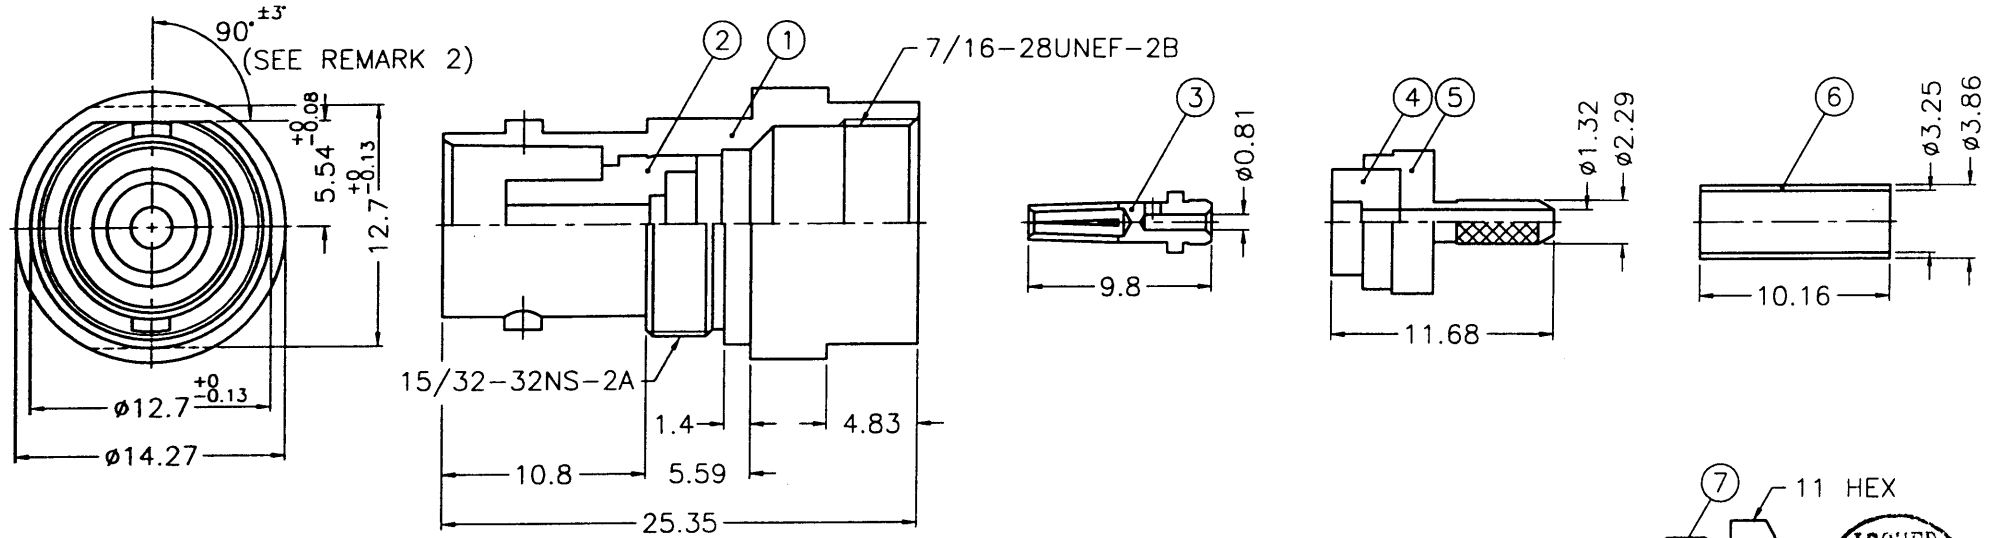

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  3. BERYLLIUM COPPER PER QQ-C-530
  4. GOLD PL. 70 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  5. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
  6. TEFLON MIL-P-19468
  7. JIS H 3250, C 2600

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

ISSUED  
2002.12.05  
R&D

7	HEX NUT	NOTE 1	NOTE 2	1	B6411G1-001-7
6	FERRULE	NOTE 7	NOTE 5	1	FR-386/325X 1016
5	BUSHING	NOTE 1	NOTE 5	1	B6411G1-001-5 -B
4	INSULATOR	NOTE 6	NATURAL	1	B6411G1-001-4
3	CONTACT PIN	NOTE 3	NOTE 4	1	B6411G1-001-3
2	INSULATOR	NOTE 6	NATURAL	1	31-33062-1-2- B
1	BODY	NOTE 1	NOTE 2	1	BD01ABH01D
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE
				0.5-6 = ±0.2	12-04-02'
				CHECKED	DATE
				6-30 = ±0.4	12-04-02'
				DRAWN	DATE
				30-120 = ±0.6	12-04-02'
				120-315 = ±1	
				315-1000 = ±1.6	12-04-02'
				1000-2000 = ±2.4	
SCALE	2.5/1	ISSUE	F	FILE NO.	F:\DWG\B\6411G1\002\50\NST70G

Amphenol	
Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China	
TITLE BNC BULKHEAD CLAMP JACK	
DRAWING NO. KJ-B6411G1-002-N/ST70G-50	
ITEM NO. 016411AAAA2ME5F	

F  
E  
D  
C  
B  
A

E  
D  
C  
B  
A