





1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.1, NO.2, NO.3 AND NO.4 WERE CHANGED\ RD-DM88051901C\05-19-99'
C	A-1	NO.1, NO.2, NO.3 AND NO.4 WERE CHANGED\ RD-DM90032101C\03-21-01'



業務部

RECOMMENDED MOUNTING HOLE
(建議架設孔)

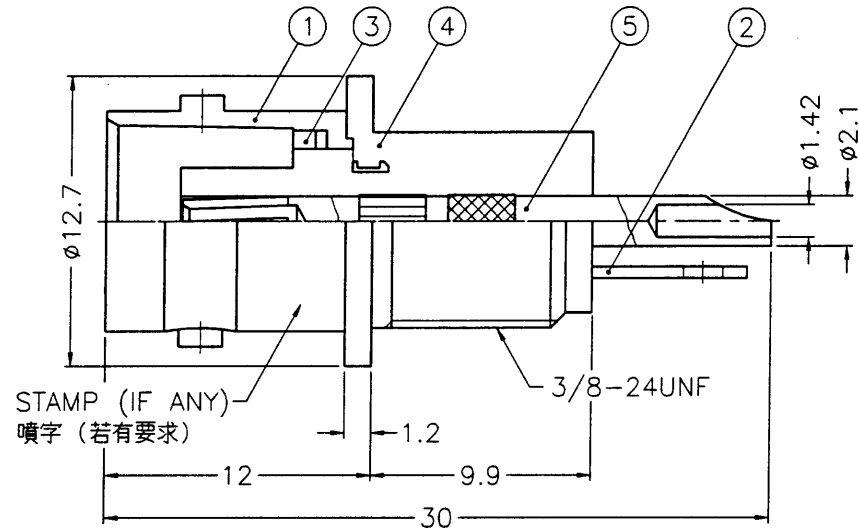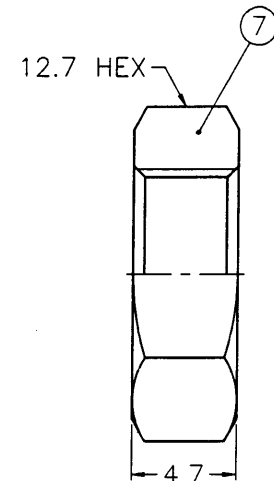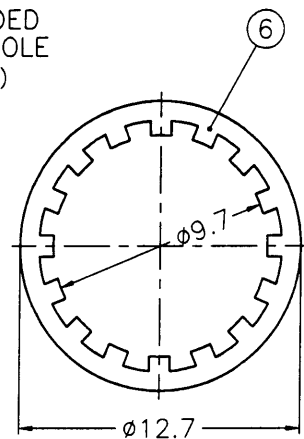

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- BRASS PER QQ-B-626
- BRASS PER QQ-B-613
- NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- PHOSPHOR BRONZE PER QQ-B-750
- GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- BRIGHT TIN PL. 200 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 100 MIN. THICK

1. MAX. PANEL THICKNESS=3.2mm

RECOMMENDED TORQUE: A MAXIMUM TORQUE OF 12 INCH-LBS MAY BE APPLIED ON HEX NUT WHEN MOUNTING CONNECTOR IN PANEL.
(建議扭力:當架設接頭於基板時 六角螺母最大適用12 inch-lbs的扭力)



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	HEX NUT	NOTE 1	NOTE 3	1	HN127-3/8-24X47
6	LOCK WASHER	NOTE 2	NOTE 3	1	LW-127/97X05
5	CONTACT PIN	NOTE 4	NOTE 5	1	B7300-5
4	INSULATOR	NYLON	WHITE	1	B6651B1-1-50-E
3	LOCK RING	NOTE 2	NOTE 3	1	
2	BRAID GROUNDING	NOTE 2	NOTE 6	1	
1	BODY	NOTE 1	NOTE 3	1	

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 03-21-01'
CHECKED	DATE 03-21-01'
DRAWN	DATE 03-21-01'

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	BNC BULKHEAD RECEPT. ISOLATED JACK
DRAWING NO.	KJ-B6651B1-NNYL3G-50
FILE NO.	F:\DWG\B\6651B1\50\NNYL3G

F
E
D
C
B
A

1 2 3 4 5 6 7 8 RD8DR11874