

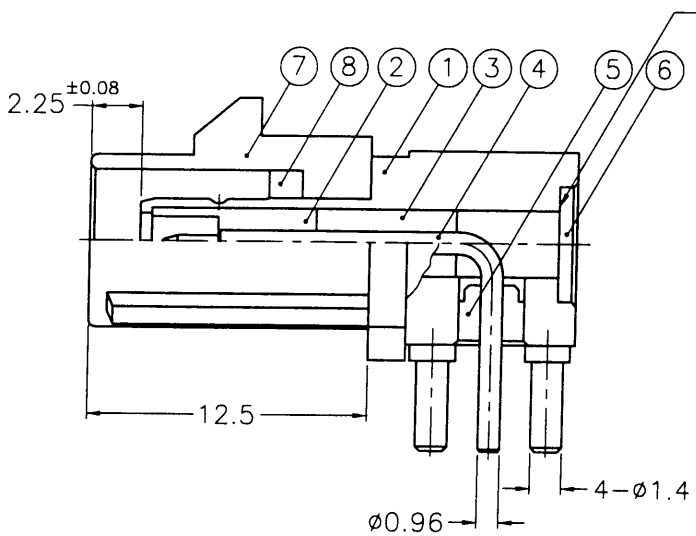
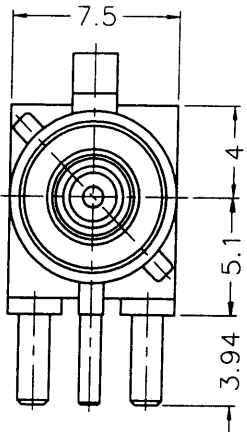



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A1	E-6	ADDED STAKE IN 4 PLACES AND ACCOUNT\N/A\ 10-22-03'

REMARK: NO.6 MUST WITHSTAND A 60 lbs. MIN. PUSHOUT FORCE FROM 'NO.1 AFTER STAKING OPERATION  
(打四點後零件6由零件1推出至少必須承受60磅推力)




BOTTOM ITEM 6 INTO ITEM 1 AS SHOWN  
(零件6的背部冲到零件1. 如圖所示)

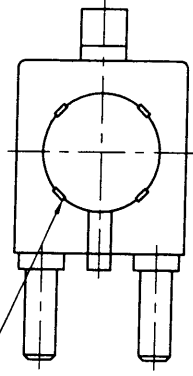

PCB MOUNTING HOLE (印刷電路板架設孔)

STAKE IN 4 PLACES EQUALLY SPACED 90° APART  
(打四點 間隔 90°)

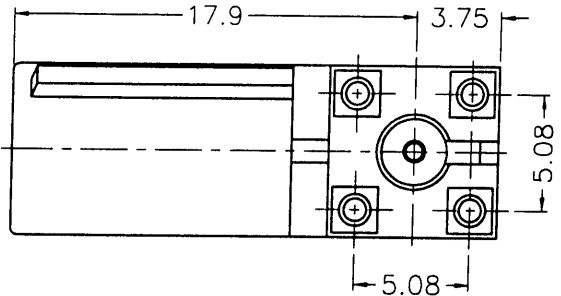

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626, ALLOY 360, 1/2 H ; JIS H3250 C 3604BD OR EQUIVALENT
  - NICKEL PL. 60 MIN. THICK OVER COPPER STRIKE
  - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - NICKEL PL. 100 MIN. THICK OVER COPPER PL. 300 MIN. THICK
  - TEFLON MIL-P-19468
  - ZINC DIECAST PER JIS H5301 ZDC2 OR EQUIVALENT
  - NYLON46 (WITH 30% GLASS FIBER)PER DSM ENGINEERING PLASTICS B V GRADE TE250F6 OR EQUIVALENT
  - BRASS PER QQ-B-613, ALLOY 260, H ; JIS H3100 C 2680R-H OR EQUIVALENT

\* HEATING STAGE: RECOMMEND SOLDERING TEMPERATURE 225°C WITHIN 40 SECONDS.



TABLE				
KEY CODING	PART NO.	DRAWING NO.	ITEM NO.	LOCK COVER
A	FA1-NARP-PCB-10	FK1252AW-005-NT30G-50	FK1252AEA02NC5F	FKLC90101A
B	FA1-NBRP-PCB-10	FK1252BW-005-NT30G-50	FK1252AEB02NC5F	FKLC90102A
C	FA1-NCRP-PCB-10	FK1252CW-005-NT30G-50	FK1252AEC02NC5F	FKLC90103A
D	FA1-NDRP-PCB-10	FK1252DW-005-NT30G-50	FK1252AED02NC5F	FKLC90104A
E	FA1-NERP-PCB-10	FK1252EW-005-NT30G-50	FK1252AEE02NC5F	FKLC90105A
F	FA1-NFRP-PCB-10	FK1252FW-005-NT30G-50	FK1252AEF02NC5F	FKLC90106A
G	FA1-NGRP-PCB-10	FK1252GW-005-NT30G-50	FK1252AEG02NC5F	FKLC90107A
H	FA1-NHRP-PCB-10	FK1252HW-005-NT30G-50	FK1252AEH02NC5F	FKLC90108A
I	FA1-NIRP-PCB-10	FK1252IW-005-NT30G-50	FK1252AEI02NC5F	FKLC90109A
K	FA1-NKRP-PCB-10	FK1252KW-005-NT30G-50	FK1252AEK02NC5F	FKLC90110A
Z	FA1-NZRP-PCB-10	FK1252ZW-005-NT30G-50	FK1252AEZ02NC5F	FKLC90111A

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
8	RING			1	FKLR00101A
7	LOCK COVER			1	SEE TABLE
6	COVER			1	CV-523X06-T-B
5	INSULATOR		NATURAL	1	FKNS01501A
4	CONTACT PIN			1	FKCPO1203A
3	INSULATOR		NATURAL	1	FKNS00906A
2	INSULATOR		NATURAL	1	FKNS00401A
1	BODY			1	FKBD03501A

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	FA1-NXRP-PCB-10	
APPROVED	<i>Com. 2</i>	DATE 10-22-03'
CHECKED	<i>Com. 2</i>	DATE 10-22-03'
DRAWN	<i>Com. 2</i>	DATE 10-22-03'
FILE NO.	F:\DWG\PK\1252XX\005\50\NT30G-A1	

**Amphenol**

Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China

TITLE: FAKRA SMB R/A PCB MOUNT PLUG

DRAWING NO.: FK1252XX-005-NT30G-50

ITEM NO.: FK1252AEX02NC5F

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A