
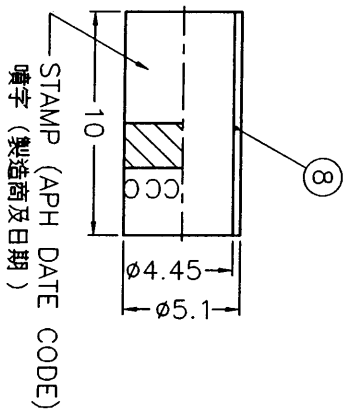

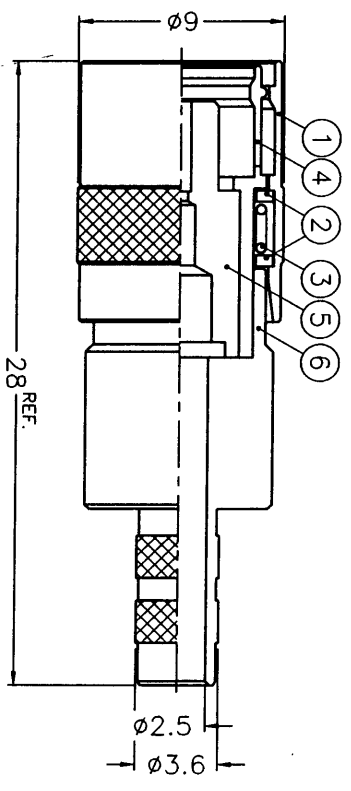


REVISIONS	
1	2
3	4
5	6
7	8

ISS	ZONE	DESCRIPTION \ PER REQUEST \ DATE

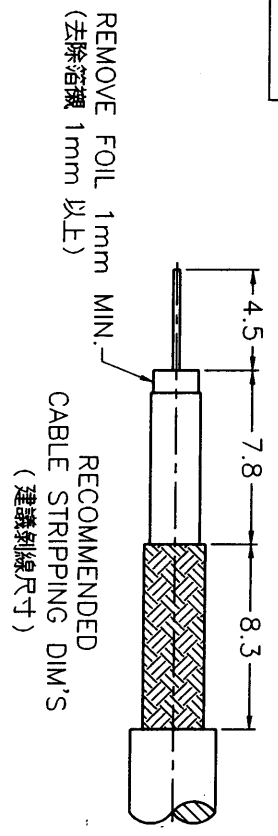

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER 00-B-626
 - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - GOLD PL. 10 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - BERYLLIUM COPPER PER 00-C-530
 - PHOSPHOR BRONZE PER 00-B-750
 - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - JIS H 3250, C 2700

9	POSITIONER	DELFIN	NATURAL	0.05	PST-BT43
8	FERRULE	NOTE 8	NOTE 2	1	FR-51/445X10 -BLA
7	CONTACT PIN	NOTE 5	NOTE 6	1	H436121B2-7 -127/035
6	BARREL	NOTE 1	NOTE 2	1	H436121B2-6 -36/25

5	INSULATOR	NOTE 7	NATURAL	1	H436121B2-5T-75
4	BODY	NOTE 1	NOTE 3	1	H436121B2-4
3	SPRING	SUS 304	NATURAL	1	H436121B2-3 -SPR
2	RING	NOTE 4	NATURAL	2	H436121B2-2
1	SHELL	NOTE 1	NOTE 2	1	H436121B2-1



- CRIMPED FERRULE HEX CRIMP SIZE .178"
- CONTACT PIN TO SOLDER OR USE DMC-MH800(GB109) CRIMP TOOL
- SOCKET HDC43/5FS
- CABLES: -BT3002
-TZC75024
-0.3/1.95/3.55

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
1					

DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED	
TOLERANCES	
0.5-6 = ±0.2	6-30 = ±0.4
30-120 = ±0.6	120-315 = ±1
315-1000 = ±1.6	1000-2000 = ±2.4

PART NO.		APPROVED	
		DATE 10-03-01'	
CHECKED		DATE 10-03-01'	
DRAWN		DATE 10-03-01'	
DRAWING NO. KJ-H436121B2-N/10GT30G-3002-75		TITLE HDCC43 POSITION LOCK CRIMP SOCKET	
ITEM NO.		DRAWING NO. KJ-H436121B2-3002-75	

Amphenol - Kai Jack

TAINAN TAIWAN

A

B

C

D

E

F

A

B

C

D

E

F