

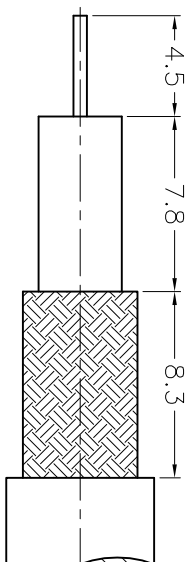
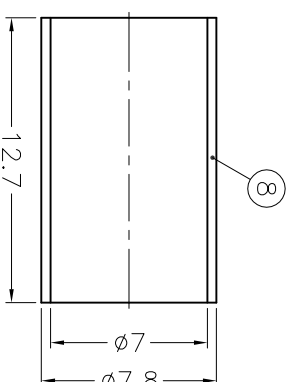


1	REVISIONS
2	DESCRIPTION \ PER REQUEST \ DATE



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

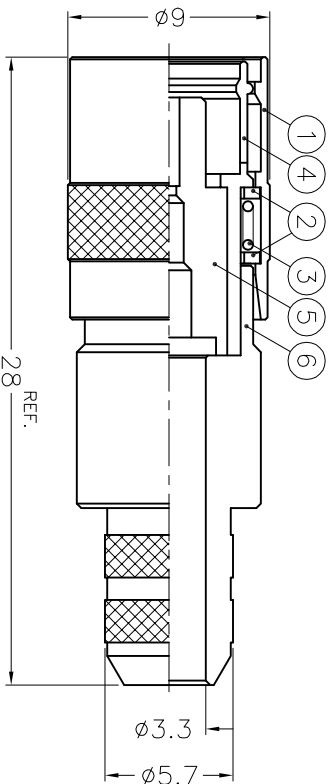

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER 00-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. BERYLLIUM COPPER PER 00-C-530
 4. PHOSPHOR BRONZE PER 00-B-750
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 6. TEFLON MIL-P-19468
 7. JIS H 3250, C 2600

1. CRIMPED FERRULE
HEX. CRIMP SIZE .269"
2. CONTACT PIN TO SOLDER OR
USE DMC-MH800(GB109) CRIMP TOOL
3. SOCKET HDC43/3C2WFS

9	POSITIONER	DELIRIN	NATURAL	0.05	PT00AAA01A
8	FERRULE	NOTE 7	NOTE 2	1	FR-78/7X127
7	CONTACT PIN	NOTE 3	NOTE 5	1	CP43AAA02A
6	BARREL	NOTE 1	NOTE 2	1	BR00ADH07A
5	INSULATOR	NOTE 6	NATURAL	1	NS43AAA01A
4	BODY	NOTE 4	NOTE 5	1	BD43AAA01A
3	SPRING	SUS 304	NATURAL	1	SG00AAF01A
2	SNAP RING	NOTE 3	NATURAL	2	SN00AAB01A
1	SHELL	NOTE 1	NOTE 2	1	SH44AAA01A

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

PART NO.	DATE
APPROVED	06-03-'02'
CHECKED	DATE
DRAWN	06-03-'02'

TITLE	
HDC43 POSITION LOCK CRIMP SOCKET	
DRAWING NO.	KJ-H436121B2-N/3GT3G-3C2W-75
ITEM NO.	446121AAA3NF7F

Amphenol - Kai Jack
TAINAN TAIWAN

1 2 3 4 5 6 7 8

A A

B B

C C

D D

E E

F F