

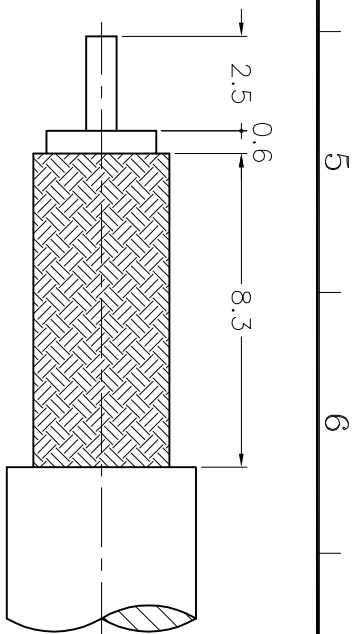
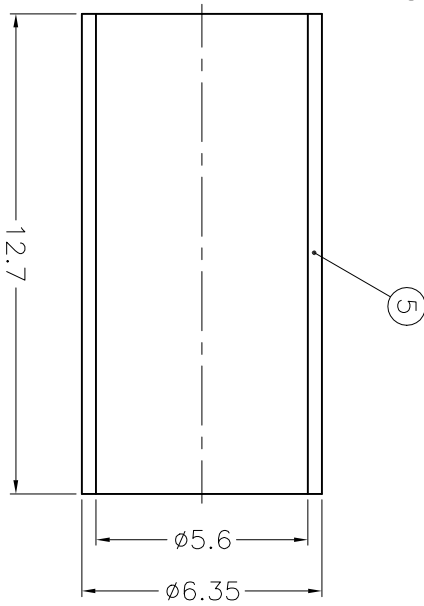


1	2	3	4	5	6	7	8
ISS ZONE		REVISIONS					
		DESCRIPTION \ PER REQUEST \ DATE					

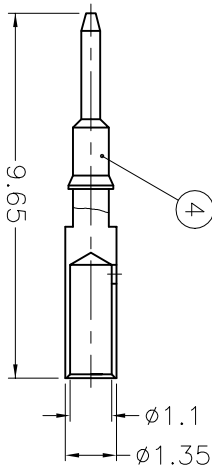

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

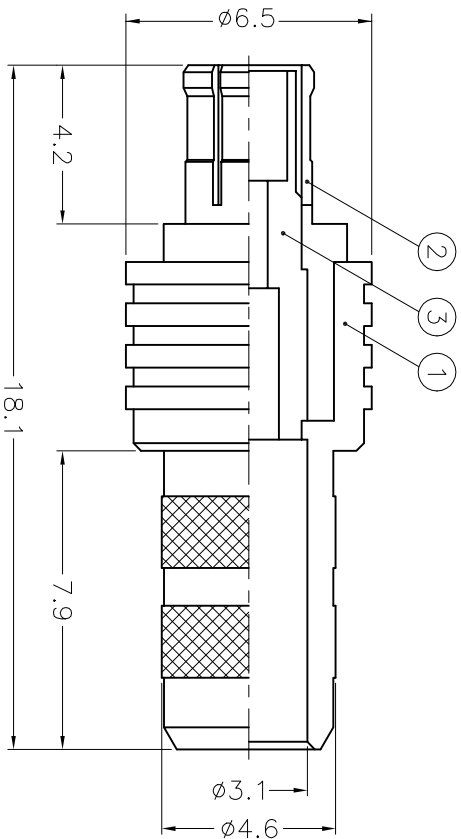

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  3. BERYLLIUM COPPER PER QQ-C-530
  4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  5. TEFLON MIL-P-19468
  6. JIS H 3250, C 2600

1. CRIMPED FERRULE  
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN  
SQ. CRIMP SIZE .043"

5	FERRULE	NOTE 6	NOTE 2	1	FR-635/56X127
4	CONTACT PIN	NOTE 1	NOTE 4	1	CP08ABH01A
3	INSULATOR	NOTE 5	NATURAL	1	NS08ABK01A
2	BODY	NOTE 3	NOTE 2	1	MCX1121A1-2-B
1	HOUSING	NOTE 1	NOTE 2	1	HS00AJ001A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6 = ±0.2	
6-30 = ±0.4	
30-120 = ±0.6	
120-315 = ±1	
315-1000 = ±1.6	
1000-2000 = ±2.4	

PART NO.	DATE
APPROVED	04-12-02'
CHECKED	DATE
DRAWN	DATE
FILE NO.	DATE
F:\DWG\MCX\1121A2\58CU-50\3GT30G	

<p><b>Amphenol - Kai Jack</b></p> <p>TAINAN TAIWAN</p>	
TITLE	MCX CRIMP PLUG (FOR RG-58A/U, 58C/U CABLE)
DRAWING NO.	KJ-MCX1121A2-3GT30G-58CU-50
ITEM NO.	081111AAAF57GE5F

A

B

C

D

E

F

1

2

3

4

5

6

7

8