



1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE


業務





RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)




RECOMMENDED  
MOUNTING HOLE  
(建議架設孔)

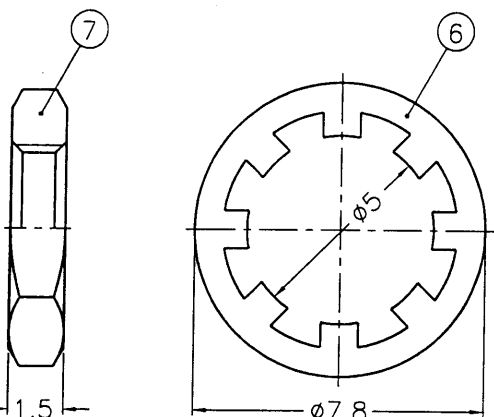

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - BRASS PER QQ-B-613
  - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - BERYLLIUM COPPER PER QQ-C-530
  - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468

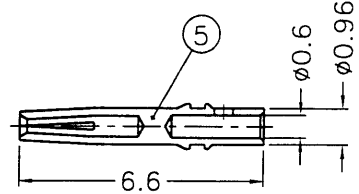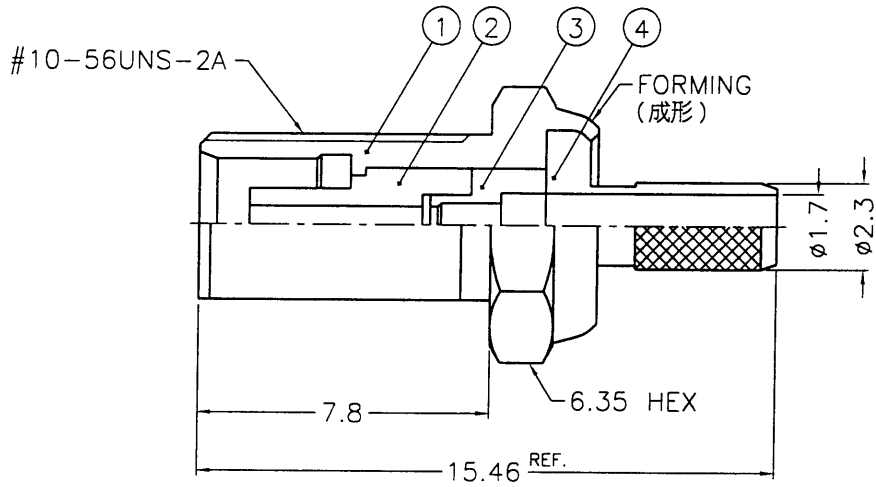

88.9.14  
R&D

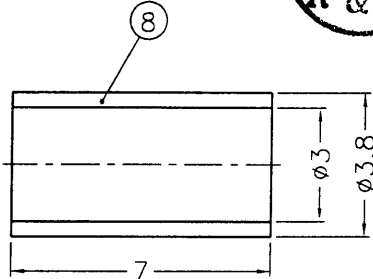

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
8	FERRULE	COPPER	NOTE 3	1	FR-38/3X7C
7	HEX NUT	NOTE 1	NOTE 3	1	HN635-10-56X15
6	LOCK WASHER	NOTE 2	NOTE 3	1	LW-78/5X05
5	CONTACT PIN	NOTE 4	NOTE 5	1	SMB6121B2-5-096/06-D
4	BARREL	NOTE 1	NOTE 3	1	SMB6121A1-4-23/17-C
3	INSULATOR	NOTE 6	NATURAL	1	SMB6121B2-3T50
2	INSULATOR	NOTE 6	NATURAL	1	MCX6121A1-2T-50
1	BODY	NOTE 1	NOTE 3	1	MCX6421A1-1

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	
0.5-6	= ±0.2	DATE		09-08-99'	
6-30	= ±0.4	DATE		09-08-99'	
30-120	= ±0.6	DATE		09-08-99'	
120-315	= ±1	DATE		09-08-99'	
315-1000	= ±1.6	DATE		09-08-99'	
1000-2000	= ±2.4	DATE		09-08-99'	

Amphenol - Kai Jack		TAINAN TAIWAN	
TITLE		MCX BULKHEAD CRIMP JACK (FOR RG-174/U,188A/U,316/U)	
DRAWING NO.		KJ-MCX6421A1-3GT30G-316U-50	
FILE NO.		F:\DWG\MCX\6421A1\316U-50\3GT30G	

1 2 3 4 5 6 7 8

MCX80195