





1 2 3 4 5 6 7 8

REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	

**SALES**

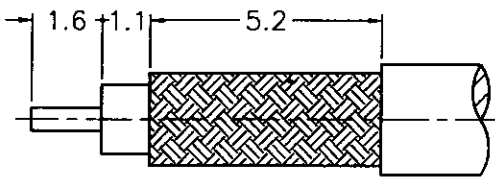

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

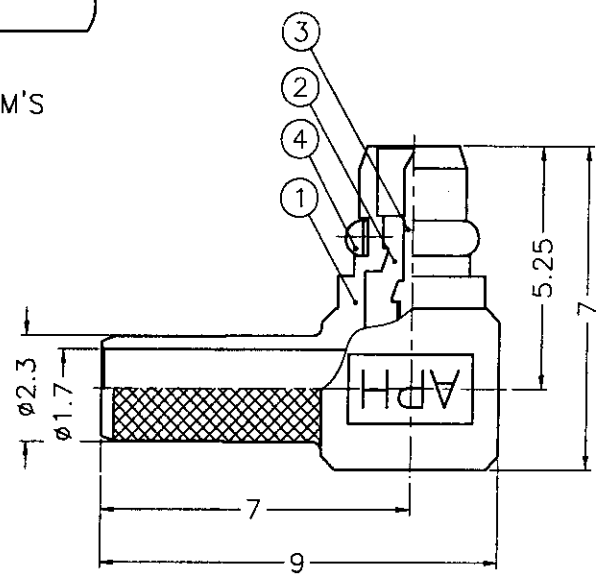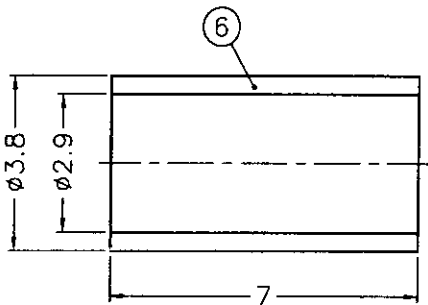

ISSUED  
2002.2.26  
R&D

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. BRASS PER QQ-B-613
  3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  4. BERYLLIUM COPPER PER QQ-C-530
  5. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  6. TEFLON MIL-P-19468
  7. ZINC DIECAST

1. CRIMPED FERRULE  
HEX. CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

DIMENSIONS ARE IN MILLIMETERS					PART NO.	
6	FERRULE	COPPER	NOTE 3	1	FR-38/29X7C	UNLESS OTHERWISE SPECIFIED TOLERANCES
5	COVER	NOTE 2	NOTE 3	1	CV-29X05-T	0.5-6 = ±0.2
4	RETAINER RING	NOTE 4	NOTE 3	1	MMCX1121A1-5-D	6-30 = ±0.4
3	CONTACT PIN	NOTE 1	NOTE 5	1	CP09AAM01A	30-120 = ±0.6
2	INSULATOR	NOTE 6	NATURAL	1	NS09AAL01A	120-315 = ±1
1	BODY	NOTE 7	NOTE 3	1	BD09AAN01A	315-1000 = ±1.6
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	1000-2000 = ±2.4
					SCALE	6/1
					ISSUE	A
					FILE NO.	F:\DWG\MMCX\112D2\316U-50\3GT30G

**Amphenol - Kai Jack**

TAINAN TAIWAN

TITLE MMCX R/A CRIMP PLUG  
(FOR RG-174/U,188A/U,316/U)

DRAWING NO. KJ-MMCX1112D2-3GT30G-316U-50

ITEM NO. 091112AAD36GE5F

7RD-DR 13893 8