

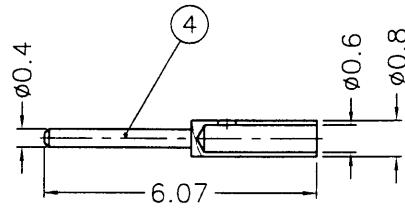



業務部

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
C	A-1	NO.2 AND NO.4 WERE CHANGE\RD-DM88060702C\ 06-07-99'
	B-1	NO.5 WAS CHANGED\RD-DM88060701C\06-07-99'

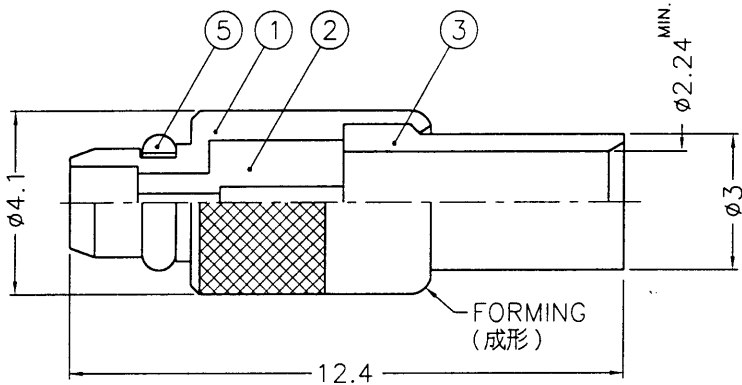

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - BERYLLIUM COPPER PER QQ-C-530
  - GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	B	PART NO.	TITLE
5	RETAINER RING	NOTE 3	NOTE 2	1	MMCX1121A1-5-C	DIMENSIONS ARE IN MILLIMETERS				APPROVED <i>Mark C</i> DATE 06-08-99' CHECKED <i>Mark C</i> DATE 06-08-99' DRAWN <i>Aca</i> DATE 06-08-99'	<b>KAI JACK INDUSTRIAL CO., LTD.</b> TAINAN TAIWAN R.O.C. TITLE MMCX SEMI-RIGID PLUG (FOR .085", .086") DRAWING NO. KJ-MMCX1181A1-3GT30G-.085-50 FILE NO. F:\DWG\MMCX\1181A1\085-50\3GT30G
4	CONTACT PIN	NOTE 1	NOTE 4	1	MMCX1121A1-4-08/06-B	UNLESS OTHERWISE SPECIFIED TOLERANCES					
3	BARREL	NOTE 1	NOTE 2	1	MMCX1181A1-3-3/224	0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4					
2	INSULATOR	NOTE 5	NATURAL	1	MMCX1121A1-2T-50-B						
1	BODY	NOTE 1	NOTE 2	1	MMCX1181A1-1						
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	B		

8MM6R14