

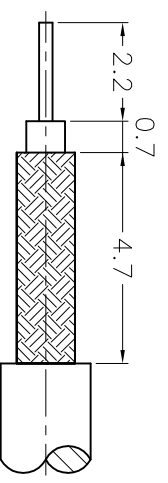



1	REVISIONS
2	DESCRIPTION \ PER REQUEST \ DATE
ISS	ZONE

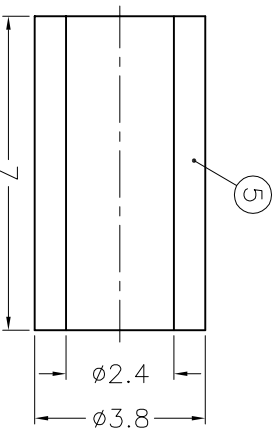

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

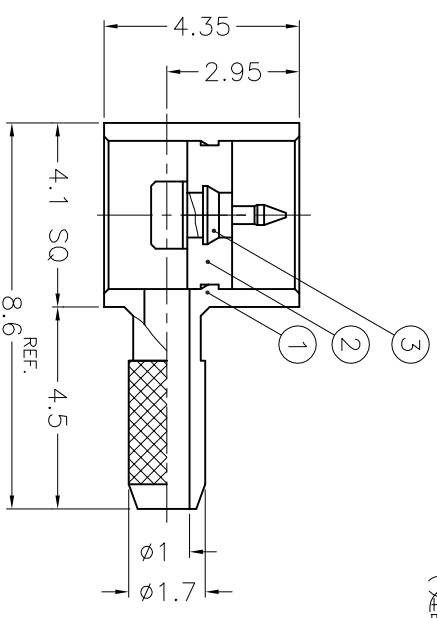

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

5	FERRULE	COPPER	NOTE 3	1	FR-38/24X7C
4	COVER	NOTE 2	NOTE 3	1	CV-34X045
3	CONTACT PIN	NOTE 1	NOTE 4	1	MMS1112A1-3
2	INSULATOR	NOTE 5	NATURAL	1	MMS1112A1-2T-50
1	HOUSING	NOTE 1	NOTE 3	1	MMS1112A1-1-17/1

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES

- 0.5-6 = ±0.2
- 6-30 = ±0.4
- 30-120 = ±0.6
- 120-315 = ±1
- 315-1000 = ±1.6
- 1000-2000 = ±2.4

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	
MMS R/A CRIMP PLUG (FOR RG-178B/U, 196A/U)	
DRAWING NO.	KJ-MMS1112A1-NTS-196A/U-50
FILE NO.	F:\DWG\MMS\1112A1\196AU-50\NTS

A

B

C

D

E

F

1

2

3

4

5

6

7

8