
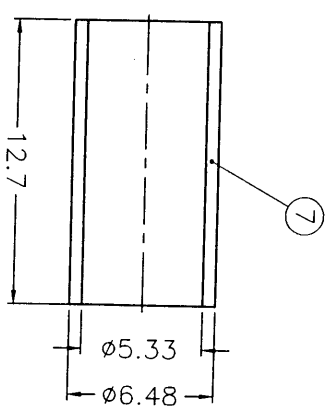
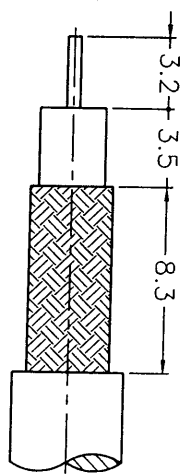


ISS	ZONE	DESCRIPTION \ PER REQUEST \ DATE
-----	------	----------------------------------

SALES

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER 00-B-626
 2. BRASS PER 00-B-613
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

8	COVER	NOTE 2	NOTE 3	1	CV-523X06-T
7	FERRULE	COPPER	NOTE 3	1	FR-648/533X 127C
6	CONTACT PIN	NOTE 1	NOTE 4	1	RFU-600-10C1-8
5	SHELL	NOTE 1	NOTE 3	1	PT-4000-002-1
4	RETAINER RING	SUS 304	NATURAL	1	PT-4000-002-6-B
3	INSULATOR	NOTE 5	NATURAL	1	RFU-600-10C1-7
2	BODY	NOTE 1	NOTE 3	1	BD19AAU01A
1	HOUSING	NOTE 1	NOTE 3	1	HSG00ACU01A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

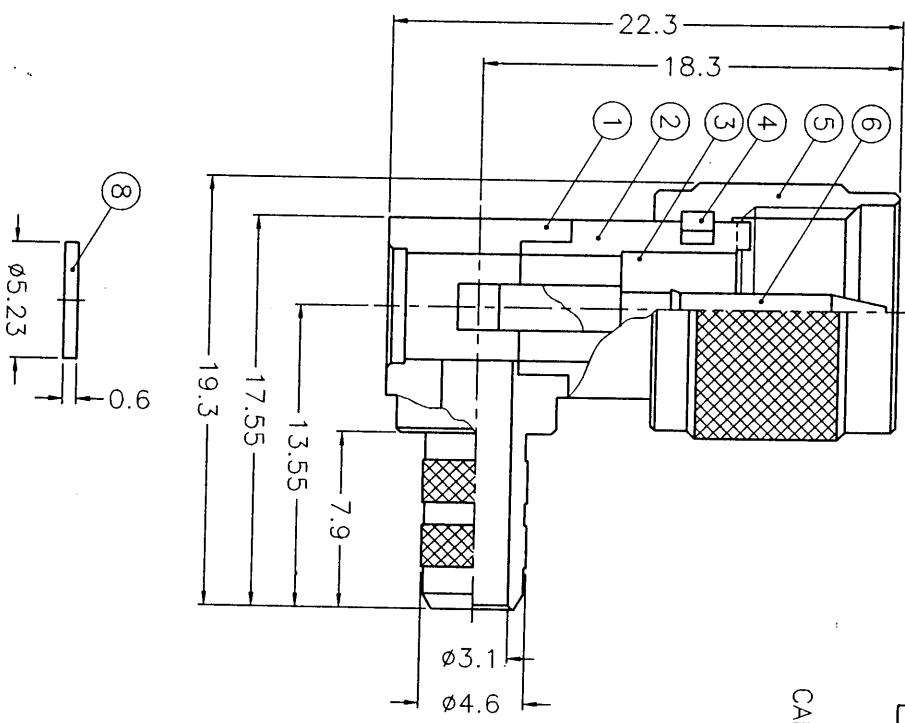

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER



Amphenol - Kai Jack
TAINAN TAIWAN

TITLE: MINI UHF R/A CRIMP PLUG (FOR RG-58/U, 58C/U)

DRAWING NO.: KJ-MU1112A1-NT3G-58U-50

DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED		PART NO.	
TOLERANCES		APPROVED	
0.5-6 = ±0.2	6-30 = ±0.4	<i>A. K. K.</i> DATE 10-03-01'	
30-120 = ±0.6	120-315 = ±1	CHECKED	
315-1000 = ±1.6	1000-2000 = ±2.4	<i>Andy C.</i> DATE 10-03-01'	
SCALE	3/1	ISSUE	A1
FILE NO.	F:\DWG\MO\1112A1\58U\50\NT3G		
ITEM NO.	191112AAA58NASF		

A B C D E F

A B C D E F

RD 1917