





1	REVISIONS
2	DESCRIPTION \ PER REQUEST \ DATE
3	
4	
5	
6	
7	
8	

ISS	ZONE	DESCRIPTION \ PER REQUEST \ DATE

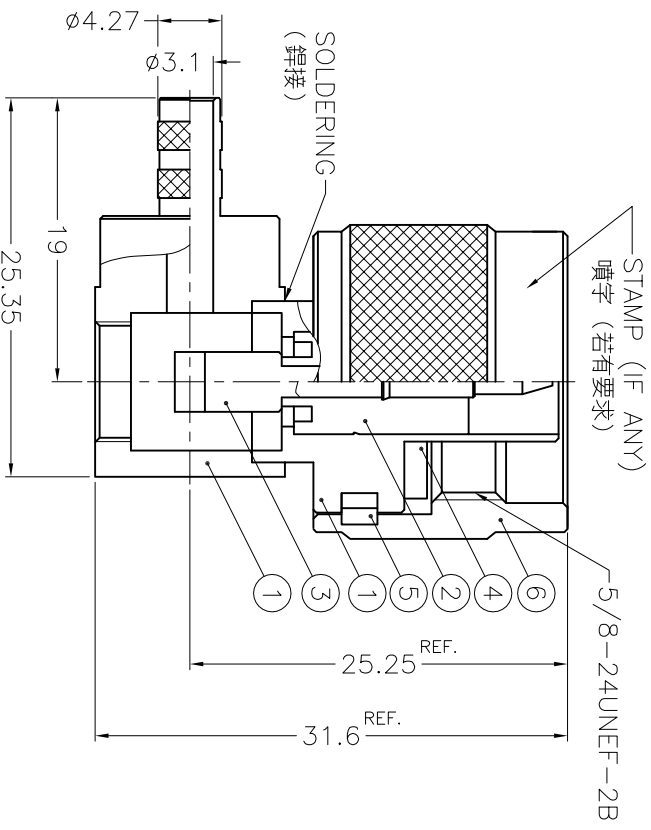

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



1. CRIMPED FERRULE
HEX. CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. ALBALOY PLATING (COPPER-TIN-ZINC) PL. 80 MIN. THICK
3. GOLD PL. 30 MIN. THICK OVER COPPER PL. 100 MIN. THICK
4. TEFLON MIL-P-19468
5. JIS H 3250, C 2600

8	FERRULE	NOTE 5	NOTE 2	1	FR-64/53X127
7	CLAMP NUT	NOTE 1	NOTE 2	1	CN00AA601A
6	SHELL	NOTE 1	NOTE 2	1	N5000-1-B
5	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
4	GASKET	SILICONE	RED	1	GS-156/8X15
3	CONTACT PIN	NOTE 1	NOTE 3	1	CP03AGW02A
2	INSULATOR	NOTE 4	NATURAL	1	NS03AAB01A
1	BODY WITH BARREL	NOTE 1	NOTE 2	1	MB03ABS02A

DIMENSIONS ARE IN MILLIMETERS		PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	
0.5-6 = ±0.2	6-30 = ±0.4	30-120 = ±0.6	120-315 = ±1
315-1000 = ±1.6	1000-2000 = ±2.4	DATE	
SCALE 2/1		DATE 07-01-03'	
ISSUE A1		DATE 07-01-03'	
DRAWING NO. N1112A4-AT30GA-58U-50		DATE 07-01-03'	
ITEM NO. 031112AAN58AG5F		DATE 07-01-03'	
DRAWING NO. N1112A4-AT30GA-58U-50		DATE 07-01-03'	
ITEM NO. 031112AAN58AG5F		DATE 07-01-03'	

Amphenol
Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China

TITLE
N R/A CRIMP PLUG
(FOR RG-58/U.58C/U)

DRAWING NO. N1112A4-AT30GA-58U-50
ITEM NO. 031112AAN58AG5F

A

B

C

D

E

F

1

2

3

4

5

6

1

2

3

4

5

6

7

8

A

B

C

D

E

F