

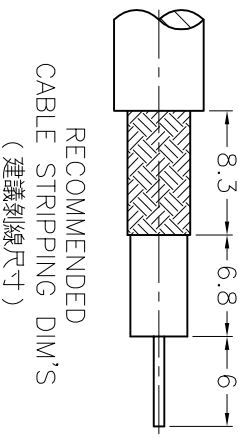



1	REVIEWS	2
3	DESCRIPTION \ PER REQUEST \ DATE	4
5		6
7		8

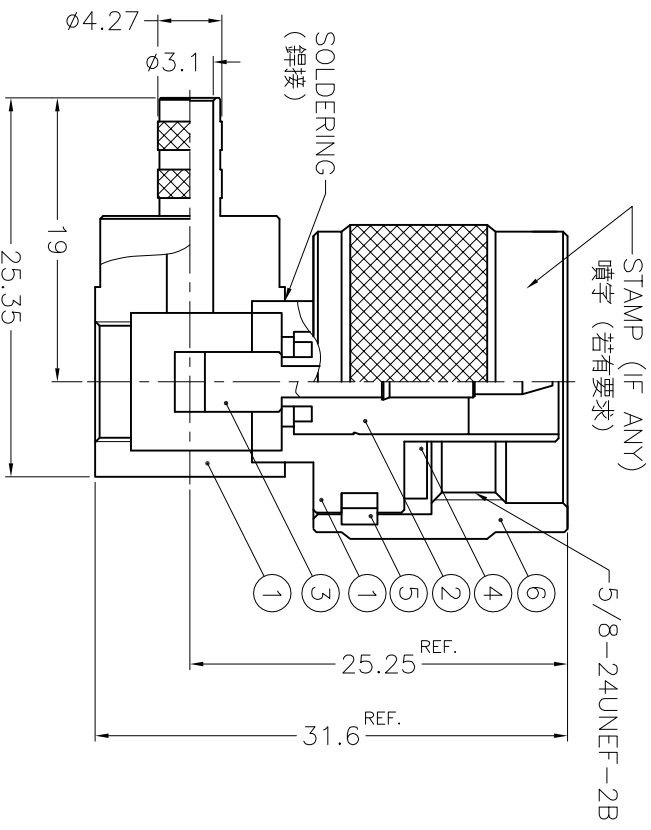

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



1. CRIMPED FERRULE
HEX. CRIMP SIZE ".213"
2. CONTACT PIN TO SOLDER

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. ALBALOY PLATING (COPPER-TIN-ZINC) PL. 80 MIN. THICK
3. GOLD PL. 30 MIN. THICK OVER COPPER PL. 100 MIN. THICK
4. TEFLON MIL-P-19468
5. JIS H 3250, C 2600

8	FERRULE	NOTE 5	NOTE 2	1	FR-64/53X127
7	CLAMP NUT	NOTE 1	NOTE 2	1	CN00AA601A
6	SHELL	NOTE 1	NOTE 2	1	N5000-1-B
5	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
4	GASKET	SILICONE	RED	1	GS-156/8X15
3	CONTACT PIN	NOTE 1	NOTE 3	1	CP03AGW02A
2	INSULATOR	NOTE 4	NATURAL	1	NS03AAB01A
1	BODY WITH BARREL	NOTE 1	NOTE 2	1	MB03ABS02A

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4

PART NO.	DATE
APPROVED	07-01-03'
CHECKED	DATE
DRAWN	07-01-03'

DANBURY, CT, USA - TAINAN, TAIWAN - SHENZHEN, CHINA	TITLE
Amphenol	N R/A CRIMP PLUG (FOR RG-58/U.58C/U)
DRAWING NO.	N1112A4-AT30GA-58U-50
ITEM NO.	031112AAN58AG5F

1 2 3 4 5 6 7 8