



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

REMARK : 1. BETWEEN NO.1 AND NO.8 MUST WITHSTAND A 100 LBS MIN. SEPARATED FORCE.  
 2. BETWEEN NO.2 AND NO.3 MUST WITHSTAND A 6 LBS MIN. SEPARATED FORCE.  
 (1. 零件 1 及 零件 8 至少須承受 100 磅的脫離力量)  
 (2. 零件 2 及 零件 3 至少須承受 6 磅的脫離力量)

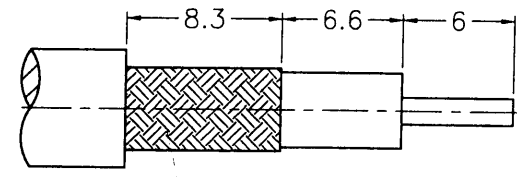

RECOMMENDED CABLE STRIPPING DIM'S (建議剝線尺寸)




NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 4. TEFLON MIL-P-19468  
 5. JIS H 3250, C 2600

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
10	FERRULE	NOTE 5	NOTE 2	1	FR-75/66X127
9	NUT	NOTE 1	NOTE 2	1	B5291-14-28
8	BARREL	NOTE 1	NOTE 2	1	N1112B2-8-56/42
7	SHELL	NOTE 1	NOTE 2	1	N5000-1H
6	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
5	GASKET	SILICONE	RED	1	GS-156/8X15
4	CONTACT BODY	NOTE 1	NOTE 2	1	N5000-5
3	CONTACT PIN	NOTE 1	NOTE 3	1	N1112B2-7
2	INSULATOR	NOTE 4	NATURAL	1	N1112A2-3
1	BODY	NOTE 1	NOTE 2	1	N1112B1-2

DIMENSIONS ARE IN MILLIMETERS		PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	DATE
0.5-6 = ±0.2	6-30 = ±0.4	<i>Gacky</i>	07-24-02'
30-120 = ±0.6	120-315 = ±1	CHECKED	DATE
315-1000 = ±1.6	1000-2000 = ±2.4	<i>Gacky</i>	07-24-02'
SCALE 2.5/1 ISSUE 1		DRAWN	DATE
		<i>KEN</i>	07-24-02'
FILE NO. F:\DWG\N\1112D1\8X-50\NT3G			

<b>Amphenol - Kai Jack</b> TAINAN TAIWAN	
TITLE N R/A CRIMP PLUG	
DRAWING NO. KJ-N1112D1-NT3G-8X-50	
ITEM NO. 031112AAP89NA5F	

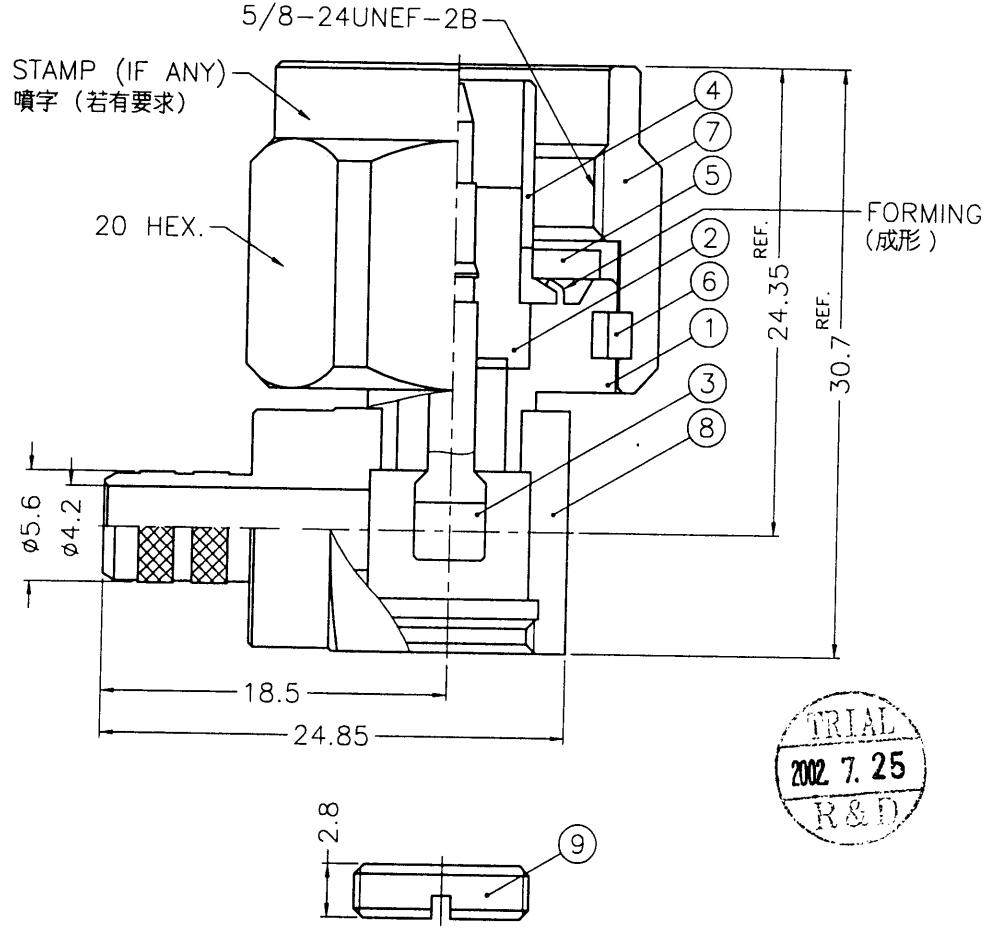

1. CRIMPED FERRULE
2. CONTACT PIN TO SOLDER

4  
3  
2  
1

F  
E  
D  
C  
B  
A