



ISS	ZONE	DESCRIPTION \ PER REQUEST \ DATE
B	B-1	NO.9 WAS CHANGED \ RD-DM900327011 \ 03-27-01'



RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

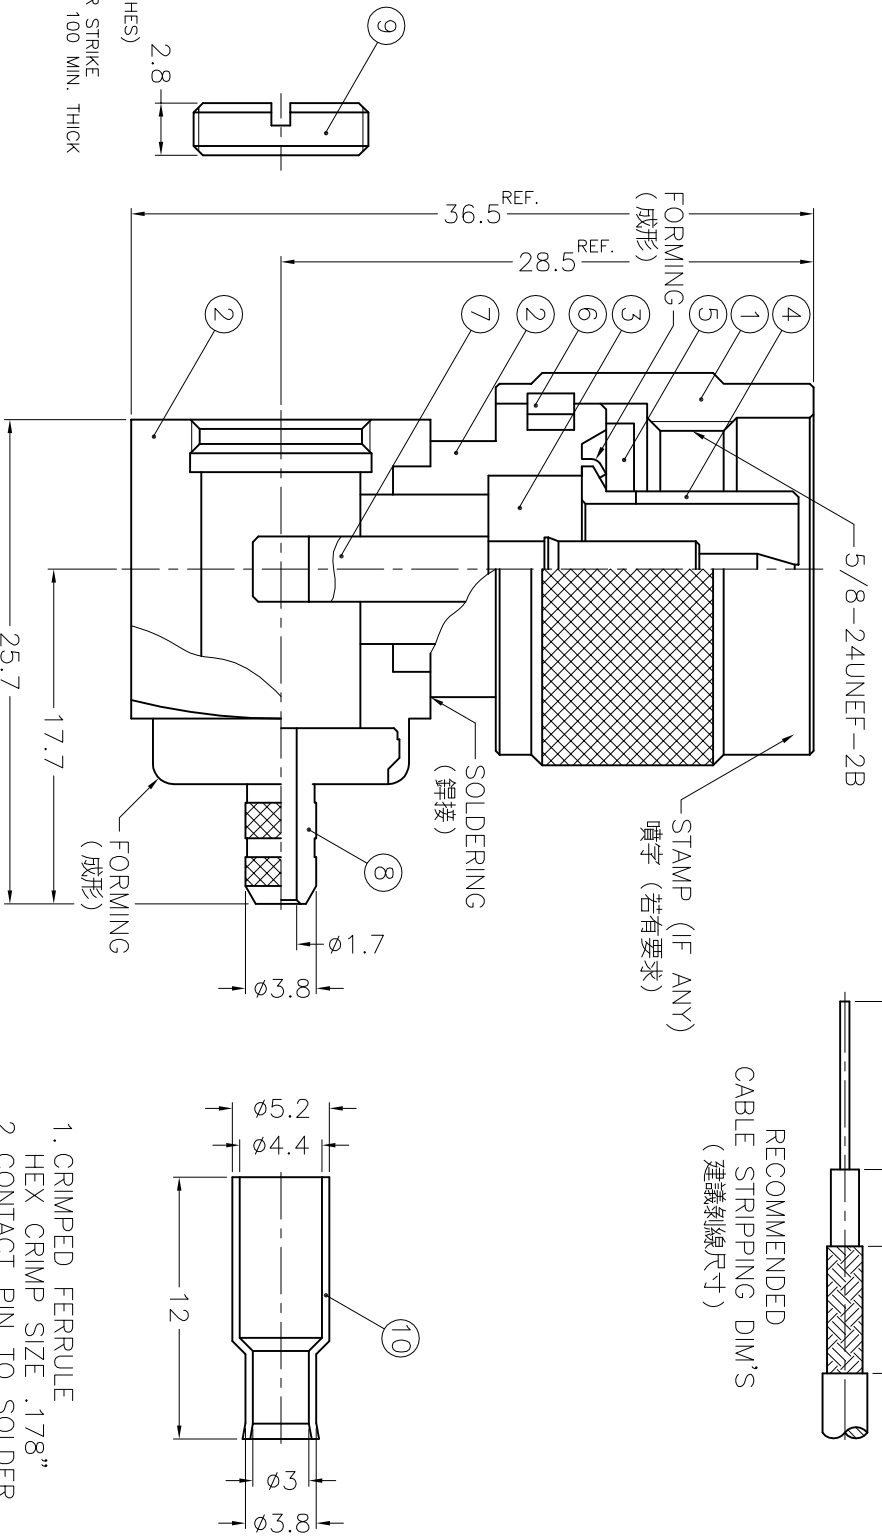

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. JIS H 3260, C 3501

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
1	SHELL	NOTE 1	NOTE 2	1	N5000-1-B
2	HOUSING WITH BODY	NOTE 1	NOTE 2	1	N1112A1-2S
3	INSULATOR	NOTE 4	NATURAL	1	N7995-2T-50
4	CONTACT BODY	NOTE 1	NOTE 2	1	N5000-5
5	GASKET	SILICONE	RED	1	GS-156/8X15
6	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
7	CONTACT PIN	NOTE 1	NOTE 3	1	N1112A1-7S-B
8	BARREL	NOTE 1	NOTE 2	1	N5000-3-38/17
9	NUT	NOTE 1	NOTE 2	1	B5291-14-28
10	FERRULE	NOTE 5	NOTE 2	1	FR-52/44-38/3 X12

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES

- 0.5-6 = ±0.2
- 6-30 = ±0.4
- 30-120 = ±0.6
- 120-315 = ±1
- 315-1000 = ±1.6
- 1000-2000 = ±2.4

SCALE	2.5/1	ISSUE	B
-------	-------	-------	---

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

TITLE	N R/A CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U)
DRAWING NO.	KJ-N1112E1-NT3G-316U-50
FILE NO.	F:\DWG\N\1112E1\316U-50\NT3G

# Amphenol - Kai Jack

TAINAN TAIWAN

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER