

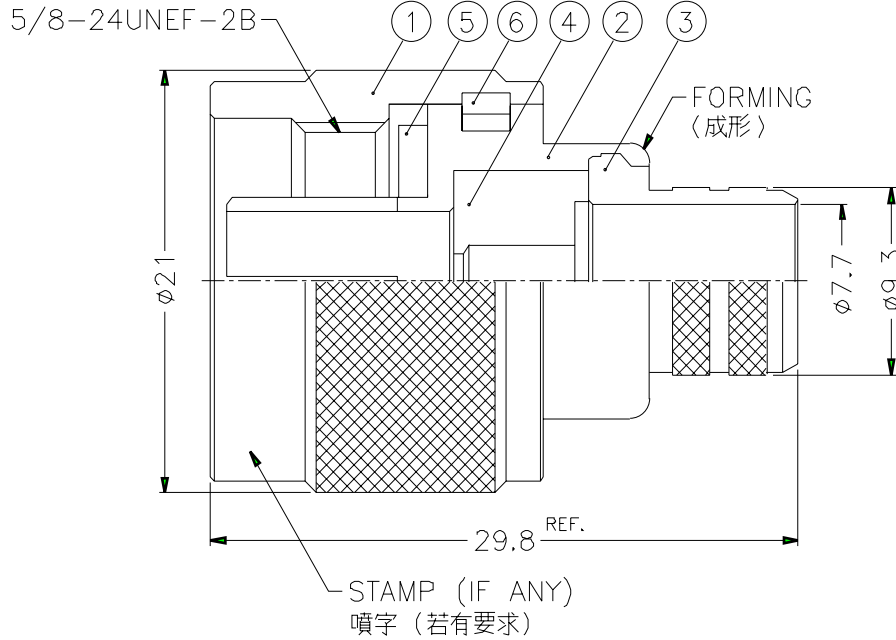
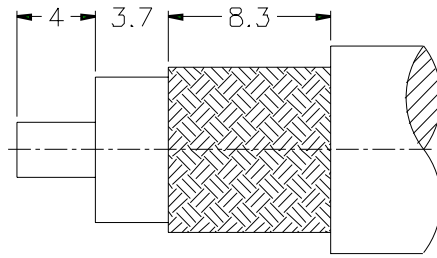


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

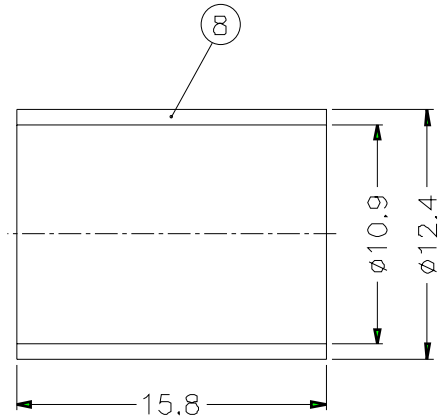

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

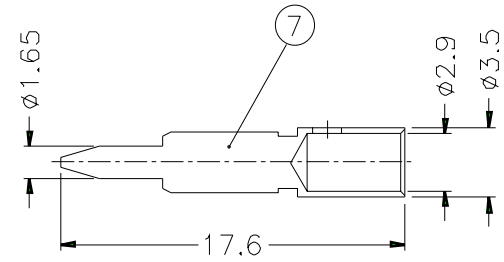

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468
  - JIS H 3250, C 2700

- CRIMPED FERRULE  
HEX CRIMP SIZE .429"
- CRIMPED CONTACT PIN  
HEX CRIMP SIZE .118"

8	FERRULE	NOTE 5	NOTE 2	1	FR-124/109X158
7	CONTACT PIN	NOTE 1	NOTE 3	1	N5201-11-35/29-C
6	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
5	GASKET	SILICONE	RED	1	GS-156/8X15
4	INSULATOR	NOTE 4	NATURAL	1	N5201-5T-50-9913
3	BARREL	NOTE 1	NOTE 2	1	N5000-3-93/77
2	BODY	NOTE 1	NOTE 2	1	N1121A2-2
1	SHELL	NOTE 1	NOTE 2	1	N5000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	
APPROVED	DATE 03-13-01'
CHECKED	DATE 03-13-01'
DRAWN	DATE 03-13-01'

<b>Amphenol - Kai Jack</b>	
TAINAN TAIWAN	
TITLE N CRIMP PLUG	
DRAWING NO. KJ-N1121A2-002-NT3G-H243-50	
FILE NO. F:\DWG\N\1121A2\002\H243-50\NT3G	