





REVISIONS	
ISS ZONE	DESCRIPTION \ PER REQUEST \ DATE
B C-2	ADDED STAMP "COMMATE" \ N/A \ 05-17-00'

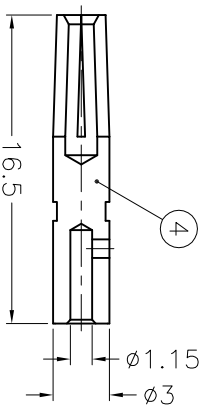

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

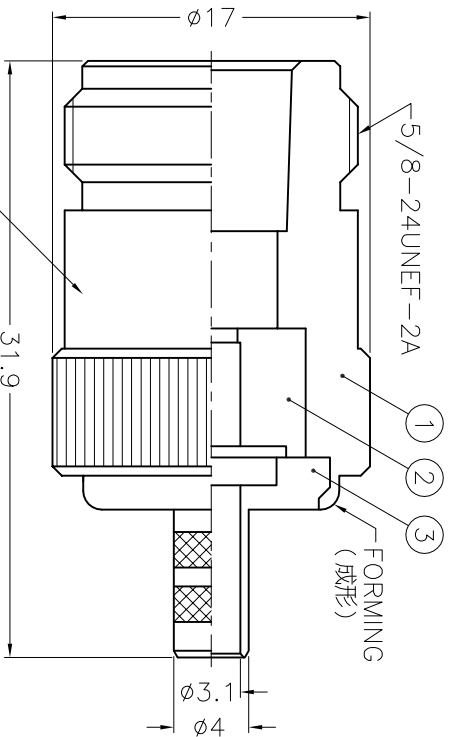

STAMP "COMMATE"
(噴字 "COMMATE")

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. PHOSPHOR BRONZE PER QQ-B-750
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	FERRULE	COPPER	NOTE 2	1	FR-648/533X 127C
4	CONTACT PIN	NOTE 3	NOTE 4	1	N7000-4-3/115
3	BARREL	NOTE 1	NOTE 2	1	N5000-3-4/31
2	INSULATOR	NOTE 5	NATURAL	1	N5000-4T-50-A
1	BODY	NOTE 1	NOTE 2	1	N7000-1

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6	= ± 0.2
6-30	= ± 0.4
30-120	= ± 0.6
120-315	= ± 1
315-1000	= ± 1.6
1000-2000	= ± 2.4

PART NO.	
N6121A1-001	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

TITLE	
N CRIMP JACK	
DRAWING NO.	FILE NO.
N6121A1-001-NT3G	F:\DWG\N6121A1\001\00

Amphenol - Kai Jack
TAINAN TAIWAN

A

B

C

D

E

F

A

B

C

D

E

F