

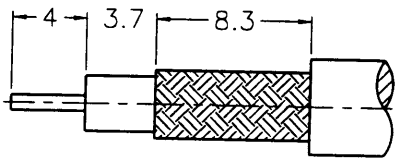




1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\APPROVED\DATE

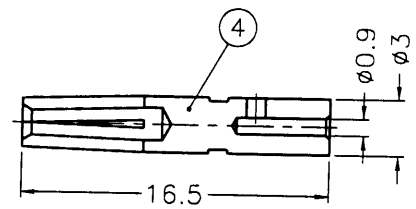

RECOMMENDED
CABLE STRIPPING DIM'S

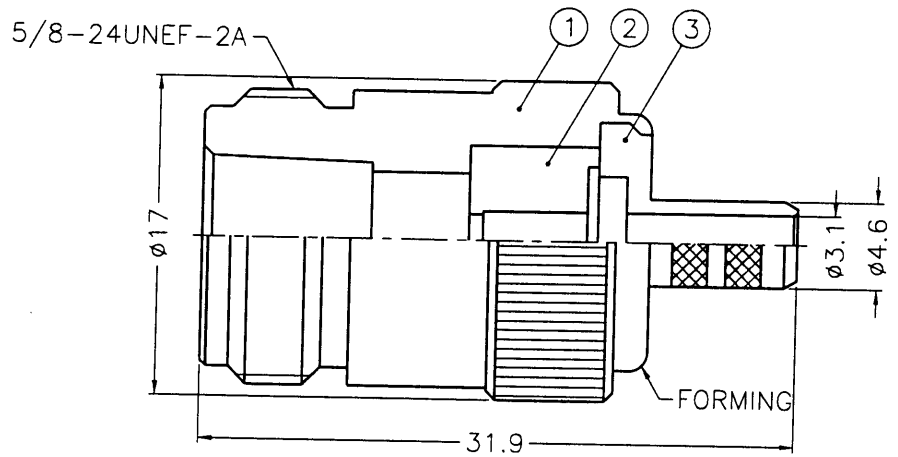

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. PHOSPHOR BRONZE PER QQ-B-750
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	FERRULE	COPPER	NOTE 2	1	FR-648/533X 127C
4	CONTACT PIN	NOTE 3	NOTE 4	1	N7000-4-3/09
3	BARREL	NOTE 1	NOTE 2	1	N5000-3-46/31
2	INSULATOR	NOTE 5	NATURAL	1	N5000-4T-50-A
1	BODY	NOTE 1	NOTE 2	1	N7000-1

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES					
0.5-6	=	±0.2			
6-30	=	±0.4			
30-120	=	±0.6			
120-315	=	±1			
315-1000	=	±1.6			
1000-2000	=	±2.4			
SCALE	2.5/1	ISSUE	A	APPROVED	DATE
				CHECKED	DATE
				DRAWN	DATE

KAI JACK INDUSTRIAL CO., LTD.
TAINAN TAIWAN R.O.C.

TITLE: N CRIMP JACK

DRAWING NO.: KJ-N6121A1-NT3G-58U-50

FILE NO.: F:\DWG\N\6121A1\58U-50\NT3G

A

1 2 3 4 5 6 7 8 8N-R1417