


1 REVISIONS	
ISS ZONE	DESCRIPTION \ PER REQUEST \ DATE

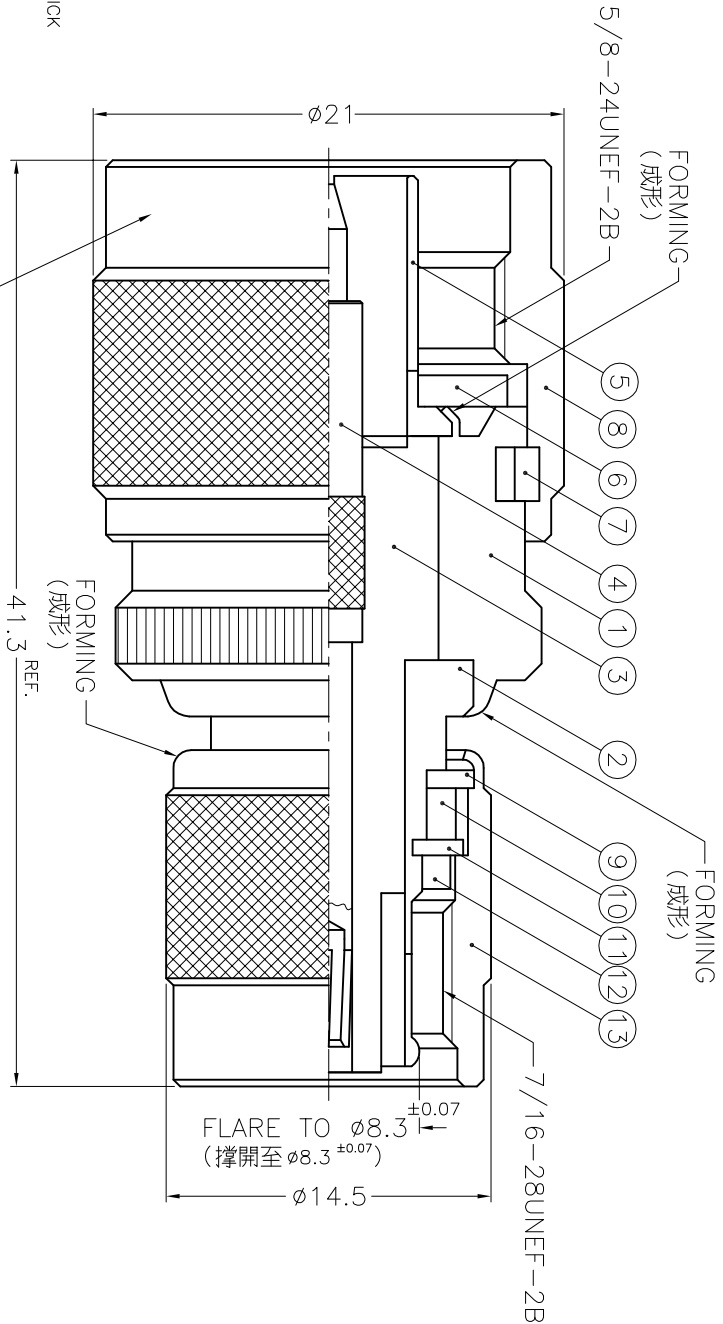

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

13	SHELL	NOTE 1	NOTE 3	1	T50000-1-B
12	GASKET	RUBBER	RED	1	GS-105/8X15
11	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
10	RING	DELFIN	NATURAL	1	T50000-6-A
9	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
8	SHELL	NOTE 1	NOTE 3	1	N5000-1-B
7	RETAINER RING	SUS 304	NATURAL	1	N5000-7-C
6	GASKET	SILICONE	RED	1	GS-156/8X15
5	CONTACT BODY	NOTE 1	NOTE 3	1	N5000-5
4	CONTACT PIN	NOTE 4	NOTE 5	1	CP00AL01A
3	INSULATOR	NOTE 6	NATURAL	1	NS00AU01A
2	BODY	NOTE 1	NOTE 3	1	NM-BM1-8
1	BODY	NOTE 1	NOTE 3	1	NM-SMAF1-2

DIMENSIONS ARE IN MILLIMETERS		UNLESS OTHERWISE SPECIFIED TOLERANCES	
0.5-6	= ±0.2	3/1	A1
6-30	= ±0.4		
30-120	= ±0.6		
120-315	= ±1		
315-1000	= ±1.6		
1000-2000	= ±2.4		

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE
FILE NO.	F:\DWG\NM\RTF1\50\NT3G

TITLE	Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China
DRAWING NO.	NM-RTF1-NT3G-50
ITEM NO.	03M-52F1-NA-5-F

Amphenol

N PLUG TO TNC REVERSE POLARITY
PLUG ADAPTOR

SHALY