

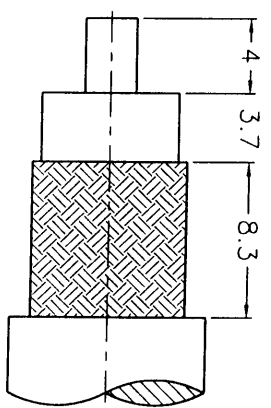
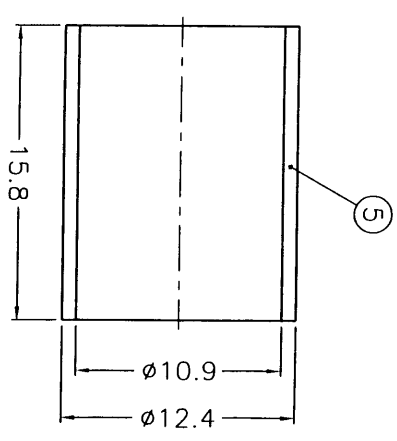



1	2	3	4	5	6	7	8
ISS	ZONE	DESCRIPTION	PER REQUEST	DATE			

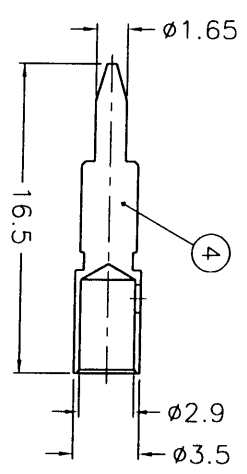

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

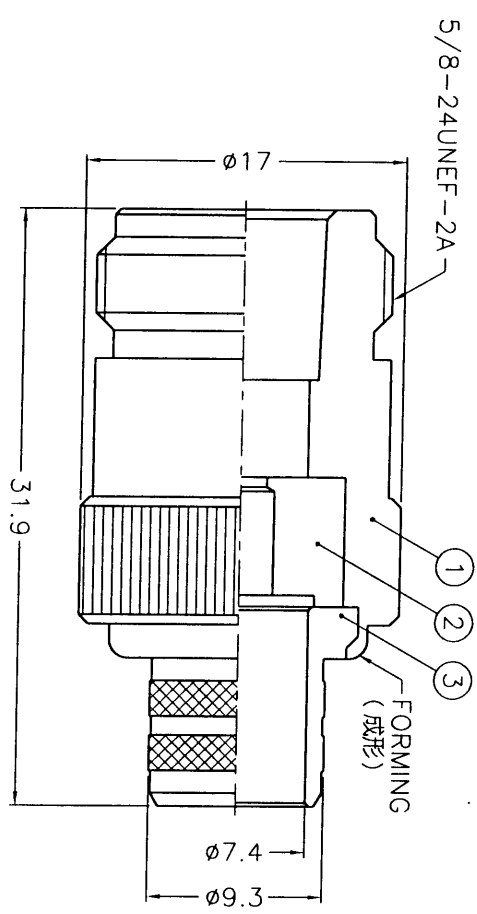

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER 00-B-626
  2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  3. GOLD PL. 3 MIN. THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. JIS H 3250, C 2700



5	FERRULE	NOTE 5	NOTE 2	1	FR-124/109X158
4	CONTACT PIN	NOTE 1	NOTE 3	1	RN6121A1-4-35
3	BARREL	NOTE 1	NOTE 2	1	N5000-3-93/74
2	INSULATOR	NOTE 4	NATURAL	1	N5201-5T-50-9913
1	BODY	NOTE 1	NOTE 2	1	N7000-1-9913

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED	
TOLERANCES	
0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1
315-1000	= ±1.6
1000-2000	= ±2.4
SCALE	2.5/1
ISSUE	A

PART NO.	
APPROVED	<i>[Signature]</i> DATE 05-05-99
CHECKED	<i>[Signature]</i> DATE 05-05-99
DRAWN	<i>[Signature]</i> DATE 05-05-99

<p>KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.</p>	
TITLE	N REVERSE POLARITY CRIMP JACK (FOR BELDEN 9913, 9914)
DRAWING NO.	KJ-RN6121A2-NI3G-9913-50
FILE NO.	F:\DWG\RN\6121A2\9913-50\NI3G

8N21648