

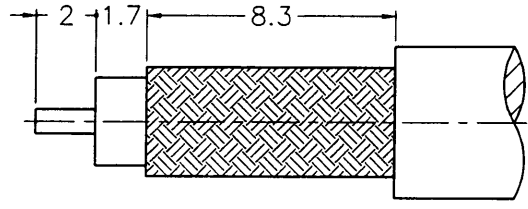
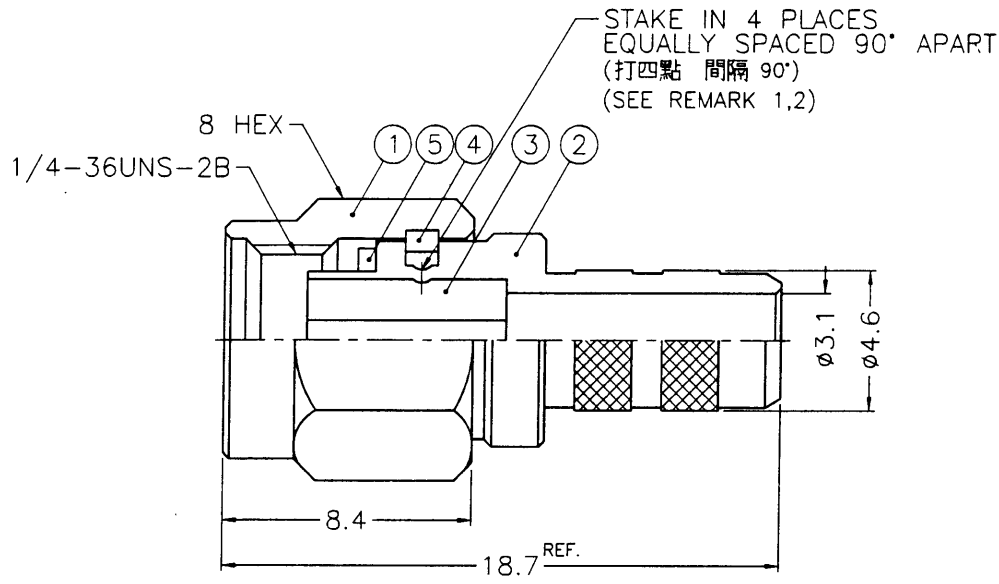


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
B	A-1	NO.1 WAS CHANGED\RD-DM89042001C\04-20-00'	
	B-1	NO.6 WAS CHANGED\RD-DM89103101Y\10-31-00'	

業務部

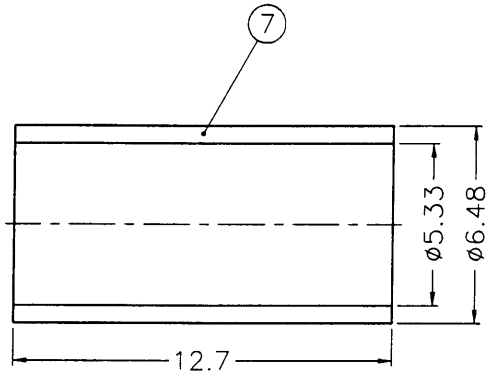

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)



- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
  - NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - BERYLLIUM COPPER PER QQ-C-530
  - GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  - TEFLON MIL-P-19468

- REMARK: 1. NO.3 MUST WITHSTAND A 6 lbs. MIN. PUSHOUT FORCE FROM NO.2 AFTER STAKING OPERATION
2. REMARK1 IS MAINTAINED BY STAMPING THE FOUR POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.2
- (1. 打四點後零件3由零件2推出至少必須承受6磅推力)  
(2. 打四點後除需符合備註1要求外 且不可擊穿零件2)



- CRIMPED FERRULE  
HEX CRIMP SIZE .213"
- CONTACT PIN TO SOLDER

7	FERRULE	COPPER	NOTE 2	1	FR-648/533X127C
6	CONTACT PIN	NOTE 3	NOTE 4	1	SMA7081-3-127/1-B
5	GASKET	SILICONE	RED	1	GS-6/43X06
4	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B
3	INSULATOR	NOTE 5	NATURAL	1	RSMA1111A1-3T-50-B
2	BODY	NOTE 1	NOTE 2	1	RSMA1111A1-2-46/31
1	SHELL	NOTE 1	NOTE 2	1	SMA5000-1-C
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS		PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	DATE
0.5-6 = ±0.2		<i>Jack C</i>	10-27-00'
6-30 = ±0.4		CHECKED	DATE
30-120 = ±0.6		<i>Jacky</i>	10-27-00'
120-315 = ±1		DRAWN	DATE
315-1000 = ±1.6		<i>Jacky</i>	10-27-00'
1000-2000 = ±2.4			
SCALE	4/1	ISSUE	B

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	SMA REVERSE POLARITY CRIMP PLUG
DRAWING NO.	KJ-RSMA1111A1-NT50G-58U-50
FILE NO.	F:\DWG\RSMA\1111A1\58U-50\NT50G