

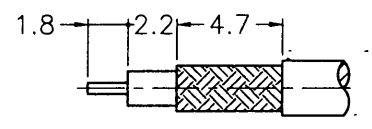


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.5 WAS CHANGED\RD-DM93011402L\01-14-04'
B1	B-6	ACCOUNT WAS CHANGED AND 4.3 WAS 4.5\N/A\
	C-4	02-27-04'

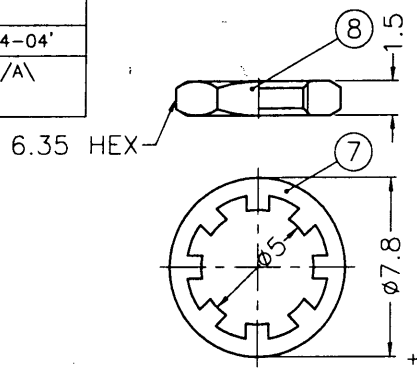


RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)





RECOMMENDED  
MOUNTING HOLE  
(建議架設孔)

**SALES**

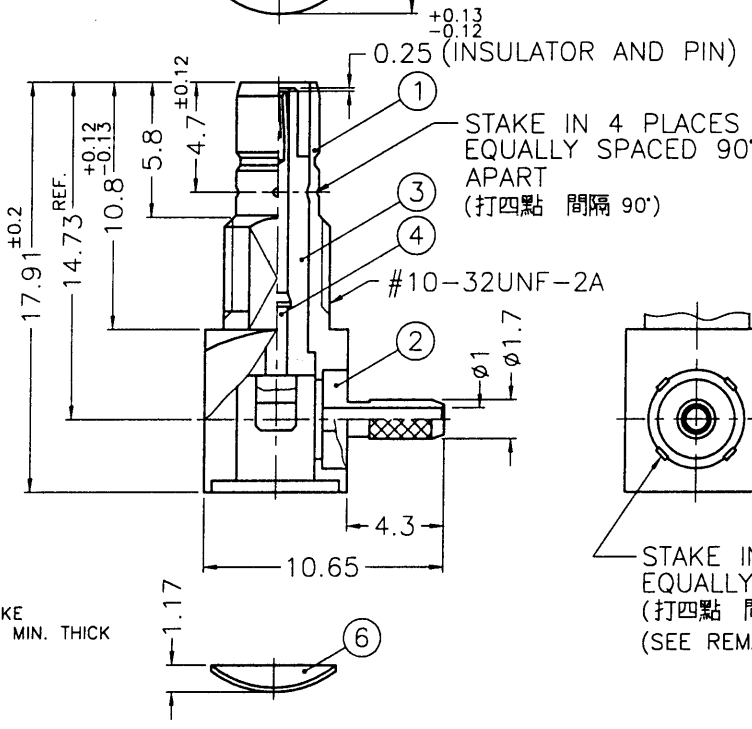

REMARK:1. NO.2 MUST WITHSTAND A 25 lbs. MIN. PUSHOUT FORCE FROM NO.1 AFTER STAKING OPERATION  
(1. 打四點後零件2由零件1推出至少必須承受25磅推力)



1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"  
2. CONTACT PIN TO SOLDER

ISSUED  
2004 3.01  
R&D

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
1. BRASS PER QQ-B-626  
2. BRASS PER QQ-B-613  
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
5. TEFLON MIL-P-19468  
6. BERYLLIUM COPPER PER QQ-C-530

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
8	HEX NUT		NOTE 1	NOTE 3	1
7	LOCK WASHER		NOTE 2	NOTE 3	1
6	COVER		NOTE 2	NOTE 3	1
5	FERRULE	COPPER	NOTE 3	NOTE 3	1
4	CONTACT PIN		NOTE 6	NOTE 4	1
3	INSULATOR		NOTE 5	NATURAL	1
2	BARREL		NOTE 1	NOTE 3	1
1	BODY		NOTE 1	NOTE 3	1

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED	DATE
0.5-6 = ±0.2				<i>Case 2</i>	02-27-04'
6-30 = ±0.4					CHECKED
30-120 = ±0.6				<i>Case 3</i>	02-27-04'
120-315 = ±1					DRAWN
315-1000 = ±1.6					02-27-04'
1000-2000 = ±2.4				FILE NO. F:\DWG\RSMB\1412A1\196AU-50\NT30G-B1	

Amphenol	
Danbury, CT, USA - Tainan, Taiwan - Shenzhen, China	
TITLE SMB REVERSE POLARITY R/A BULKHEAD JACK (FOR RG-178B/U, 196A/U)	
DRAWING NO. RSMB1412A1-NT30G-196AU-50	
ITEM NO. 621412AAA16NC5F	

7RD-DR 20588 8