

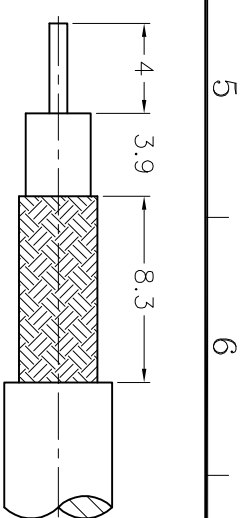
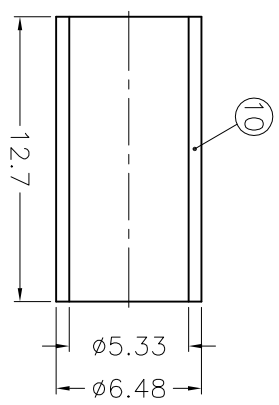


1	REVISIONS
2	DESCRIPTION \ PER REQUEST \ DATE
3	
4	
5	
6	
7	
8	
ISS	ZONE

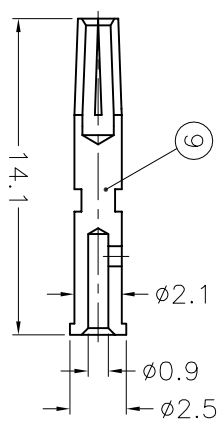

RECOMMENDED
CABLE STRIPPING DIM'S

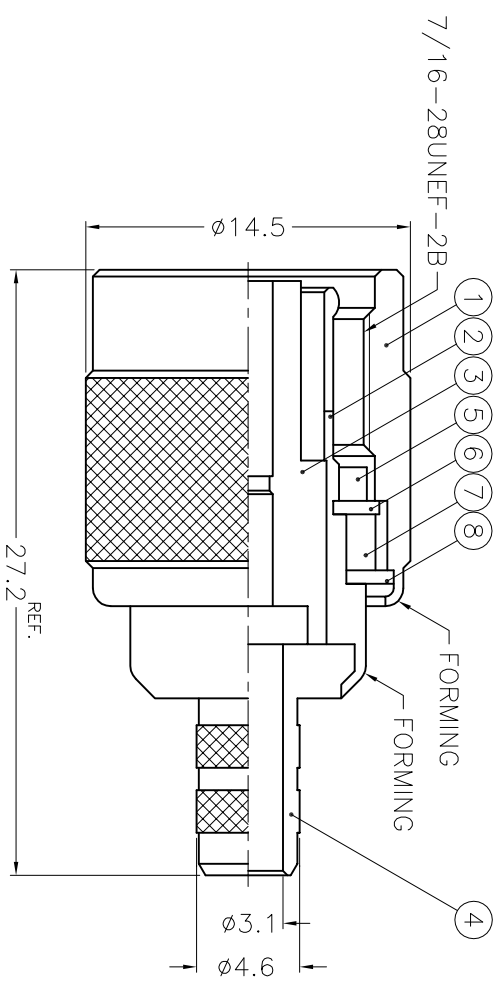

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. BRASS PER QQ-B-613
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 4. PHOSPHOR BRONZE PER QQ-B-750
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 6. TEFLON MIL-P-19468

10	FERRULE	COPPER	NOTE 3	1	FR-648/533X 127C
9	CONTACT PIN	NOTE 4	NOTE 5	1	B74000-8-25/09
8	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
7	RING	DELIRIN	NATURAL	1	T50000-6-A
6	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
5	GASKET	RUBBER	RED	1	GS-105/8X15
4	BARREL	NOTE 1	NOTE 3	1	BS0900-6-46/31
3	INSULATOR	NOTE 6	NATURAL	1	RB1121A1-3T-50
2	BODY	NOTE 1	NOTE 3	1	RB1121A1-2
1	SHELL	NOTE 1	NOTE 3	1	T50000-1-B
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE	3/1	ISSUE	A
-------	-----	-------	---

PART NO.	DATE
APPROVED	02-23-99'
CHECKED	02-23-99'
DRAWN	02-23-99'

TITLE	DRAWING NO.	FILE NO.
Amphenol - Kai Jack TAINAN TAIWAN	KJ-RT1121A1-NT3G-58U-50	F:\DWG\RT\1121A1\58U-50\NT3G
TNC REVERSE POLARITY CRIMP PLUG		

A

B

C

D

E

F

A

B

C

D

E

F