





1	REVISED
2	REVISIONS
3	DESCRIPTION \ PER REQUEST \ DATE
ISS	ZONE



RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

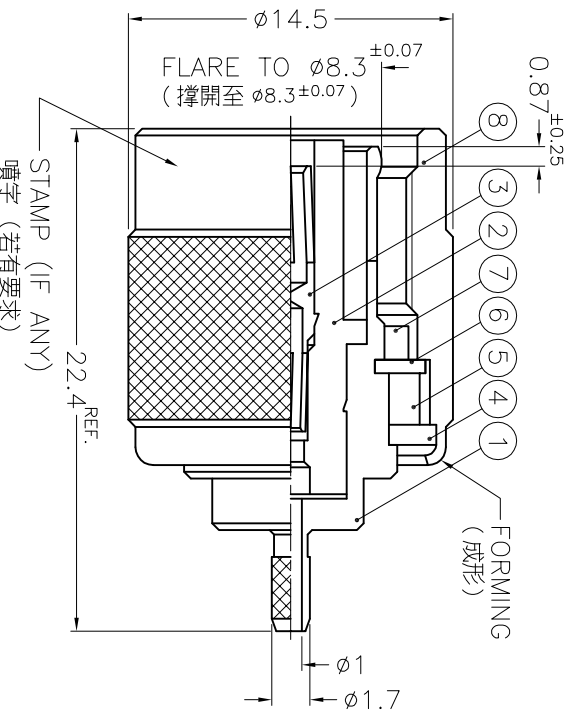

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL P.L. 100 MIN. THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750
5. GOLD P.L. 3 MIN. THICK OVER NICKEL P.L. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

10	FERRULE	COPPER	NOTE 3	1	FR-38/24X7C
9	CONTACT PIN	NOTE 1	NOTE 5	1	B50003-9-0.4
8	SHELL	NOTE 1	NOTE 3	1	T50000-1-B
7	GASKET	RUBBER	RED	1	GS-105/8X15
6	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
5	RING	DELRI	NATURAL	1	T50000-6-A
4	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
3	CONTACT PIN	NOTE 4	NOTE 5	1	CP01ANK01A
2	INSULATOR	NOTE 6	NATURAL	1	NSS1AAR01A
1	BODY	NOTE 1	NOTE 3	1	BD01ALE01A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES

- 0.5-6 = ±0.2
- 6-30 = ±0.4
- 30-120 = ±0.6
- 120-315 = ±1
- 315-1000 = ±1.6
- 1000-2000 = ±2.4

PART NO.	DATE
APPROVED	07-10-03'
CHECKED	DATE
DRAWN	DATE
FILE NO.	DATE
F:\DWG\RT\1121G1\196AU-NT3G	07-10-03'

TITLE	DANBURY, CT, USA - Tainan, Taiwan - Shenzhen, China
TNC REVERSE POLARITY CRIMP PLUG (FOR RG-178B/U, 196A/U)	
DRAWING NO.	RT1121G1-NT3G-196AU-50
ITEM NO.	521121AAU16NA5F

**Amphenol**

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN  
SQ. CRIMP SIZE 0.7(mm)

A

B

C

D

E

F

A

B

C

D

E

F