






ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

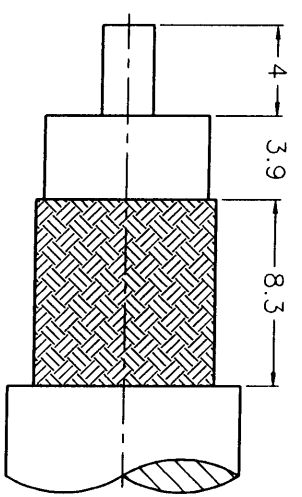

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

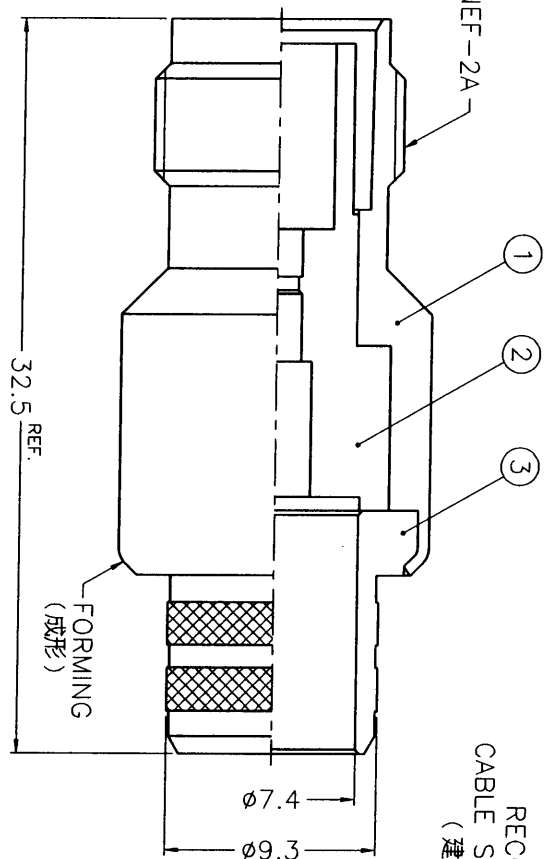

1. CRIMPED FERRULE  
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .118"

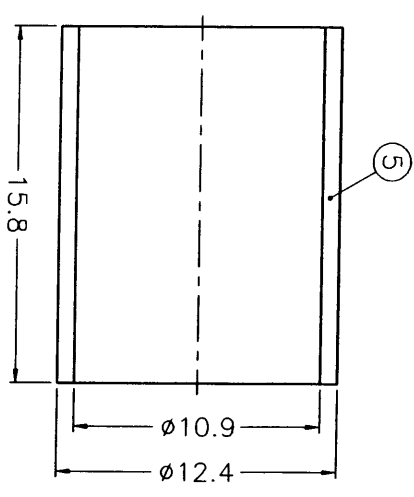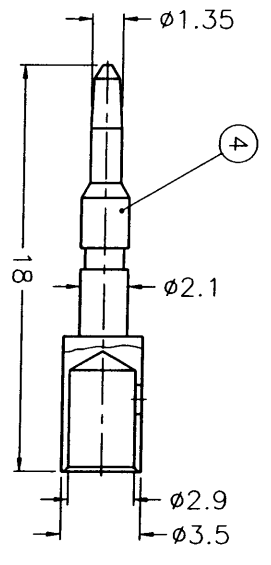

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK  
 4. TEFLON MIL-P-19468  
 5. JIS H 3250, C 2700

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
5	FERRULE	NOTE 5	NOTE 2	1	FR-124/109X158
4	CONTACT PIN	NOTE 1	NOTE 3	1	RT6121A6-4-35/ 29-B
3	BARREL	NOTE 1	NOTE 2	1	NS000-3-93/74
2	INSULATOR	NOTE 4	NATURAL	1	RT6121A6-2T-50
1	BODY	NOTE 1	NOTE 2	1	RT6121A6-1

DIMENSIONS ARE IN MILLIMETERS  
 UNLESS OTHERWISE SPECIFIED  
 TOLERANCES  
 0.5-6 = ±0.2  
 6-30 = ±0.4  
 30-120 = ±0.6  
 120-315 = ±1  
 315-1000 = ±1.6  
 1000-2000 = ±2.4

PART NO.	APPROVED	DATE
	<i>[Signature]</i>	12-01-99'
	CHECKED	DATE
	<i>[Signature]</i>	12-01-99'
	DRAWN	DATE
	<i>[Signature]</i>	12-01-99'

TITLE	DRAWING NO.
TNC REVERSE POLARITY CRIMP JACK (FOR BELDEN 9913, 9914)	KJ-RT6121A6-NT3G-9913-50
Amphenol - Kai Jack TAINAN TAIWAN	
FILE NO.	F:\DWG\RT\6121A6\9913-50\NT3G



BT 21.58