


業務部

REMARK: 1. NO.2 MUST WITHSTAND A 6 lbs. MIN. PUSHOUT FORCE FROM NO.1 AFTER STAKING OPERATION
 2. REMARK 1 IS MAINTAINED BY STAMPING THE FOUR POINTS SHOWN ON THE DRAWING WITHOUT PUNCTURING NO.1
 (1. 打四點後零件2由零件1推出至少必須承受6磅推力)
 (2. 打四點後除需符合備註1要求外且不可擊穿零件1)



NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. BERYLLIUM COPPER PER QQ-C-530
 4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

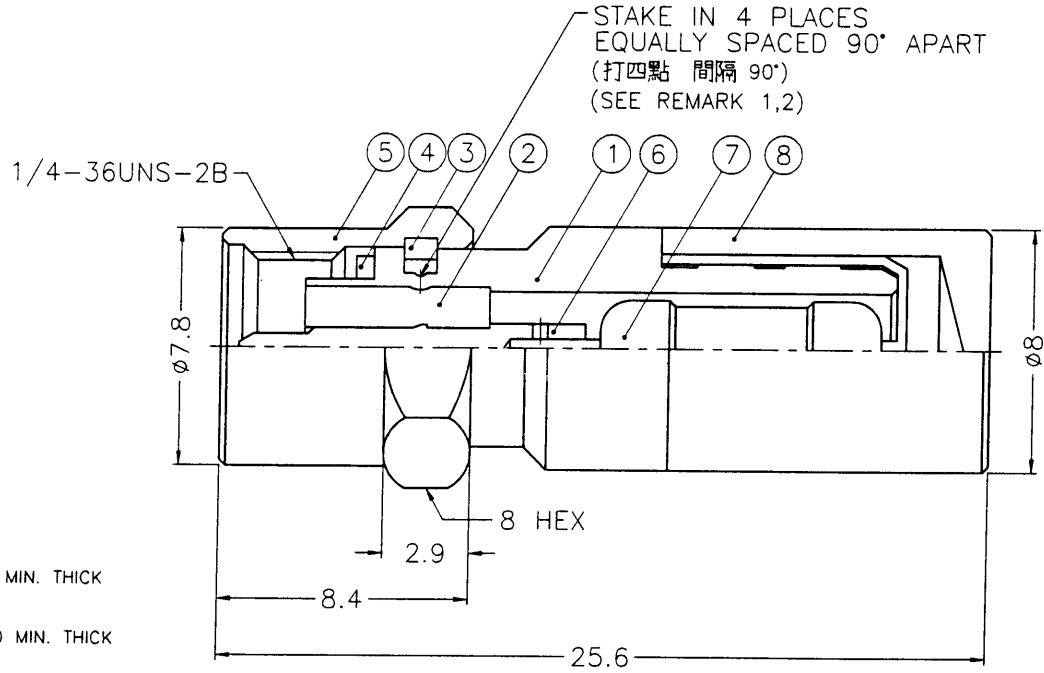

8	COVER	NOTE 1	NOTE 2	1	B5209-10
7	RESISTOR	SOR		1	RS-50R-0.5W-1%
6	CONTACT PIN	NOTE 1	NOTE 4	1	SMA1111A1-L200-6-16/08
5	SHELL	NOTE 1	NOTE 2	1	SMA1111A1-001-1-B
4	GASKET	SILICONE	RED	1	GS-6/43X06
3	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B
2	INSULATOR	NOTE 5	NATURAL	1	SMA1111A1-L200-3T-50
1	BODY	NOTE 1	NOTE 2	1	SMA1004A2-1-56/37

DIMENSIONS ARE IN MILLIMETERS		PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED <i>Jack C</i> DATE 07-20-00'	
0.5-6 = ±0.2		CHECKED <i>Jackey</i> DATE 07-20-00'	
6-30 = ±0.4		DRAWN <i>Jackey</i> DATE 07-20-00'	
30-120 = ±0.6			
120-315 = ±1			
315-1000 = ±1.6			
1000-2000 = ±2.4			

Amphenol - Kai Jack TAINAN TAIWAN	
TITLE SMA TERMINATOR PLUG	
DRAWING NO. KJ-SMA1004A2-3GT50G-50R-0.01-0.5W	
FILE NO. F:\DWG\SMA\1004A2\50R-0.01\0.5W\3GT50G	