
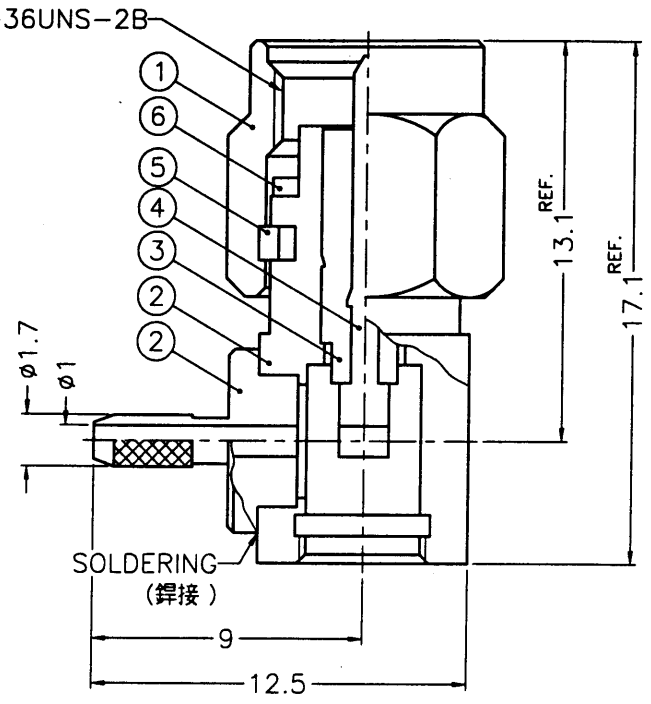

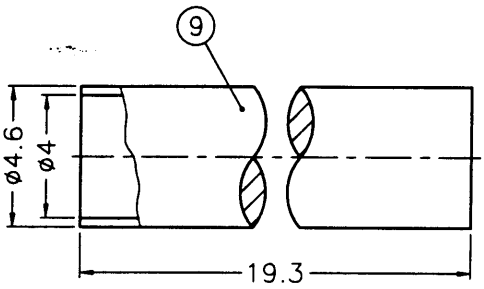



REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-1	NO.1 WAS CHANGED\RD-DM89042001C\04-20-00'
B1	B-1	NO.9 WAS CHANGED\N/A\07-16-02'

SALES

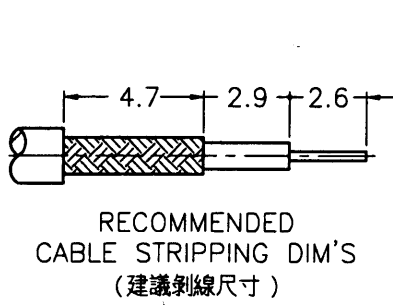

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. BERYLLIUM COPPER PER QQ-C-530
 4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 5. TEFLON MIL-P-19468

- REMARK : 1. BETWEEN NO.2 AND NO.3 MUST WITHSTAND A 6 LBS MIN. SEPARATED FORCE.
 2. BETWEEN NO.3 AND NO.4 MUST WITHSTAND A 6 LBS MIN. SEPARATED FORCE.
 (1. 零件 2 及零件 3 至少須承受 6 磅的脫離力量)
 (2. 零件 3 及零件 4 至少須承受 6 磅的脫離力量)



ISSUED
2002. 7. 18
R&D

1. CRIMPED FERRULE HEX. CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

9	HEAT SHRINK TUBING		BLACK	1	HT-46/4X193
8	FERRULE	COPPER	NOTE 2	1	FR-38/24X55C
7	COVER	NOTE 1	NOTE 2	1	SMA1112A3-8-B
6	GASKET	SILICONE	RED	1	GS-6/43X06
5	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B
4	CONTACT PIN	NOTE 1	NOTE 4	1	SMA1112A4-4-B
3	INSULATOR	NOTE 5	NATURAL	1	SMA1112A3-3T-50
2	HOUSING	NOTE 1	NOTE 2	1	SMA1112A3-2S-17/1
1	SHELL	NOTE 1	NOTE 2	1	SMA5000-1-C
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS				PART NO.		
UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED	DATE	
				<i>gawcky</i>		07-16-02'
				CHECKED	DATE	
				<i>Ken</i>		07-16-02'
DRAWN		DATE				
<i>Ken</i>		07-16-02'				
SCALE	4/1	ISSUE	B1	FILE NO.	F:\DWG\SMA\1112A3\196AU-50\3GT50G	

Amphenol - Kai Jack	
TAINAN TAIWAN	
TITLE	SMA R/A CRIMP PLUG (FOR RG-178B/U, 196A/U)
DRAWING NO.	KJ-SMA1112A3-3GT50G-196AU-50
ITEM NO.	111112AAB16GA5F

7 RD DR 14908 8