





ISS		DESCRIPTION PER REQUEST \ DATE	
A1	A-1	NO.1 WAS CHANGED \ RD-DM89042001C \ 04-20-00'	
A-7	A-7	SMA1181Z1-3G/ST50G-.141-50 WAS SMA1181Z1-3G/ST50G-.141-50 \ N/A \ 04-25-02'	

REVISIONS

1 2 3 4 5 6 7 8



RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

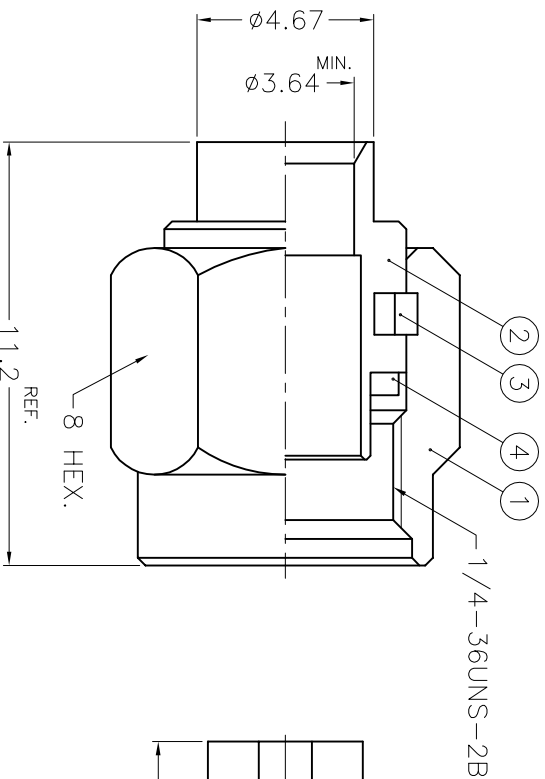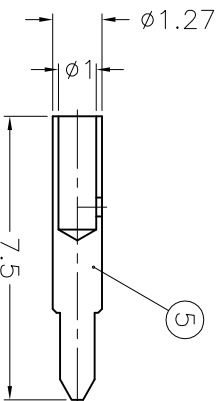

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. STAINLESS STEEL PER QQ-S-764, TYPE 303
  3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  4. BERYLLIUM COPPER PER QQ-C-530
  5. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  6. TEFLON MIL-P-19468
  7. PASSIVATED PER QQ-P-35

1. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A1	FILE NO.	F:\DWG\SMA\1181Z1\141-50\3G/ST50G	
6	INSULATOR	NOTE 6	NATURAL	1	SMA5081-5T-50	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4						
5	CONTACT PIN	NOTE 1	NOTE 5	1	SMA5081-6-127/		PART NO.	APPROVED	DATE	04-25-02'		
4	GASKET	SILICONE	RED	1	GS-6/43X06		CHECKED	DATE	04-25-02'			
3	RETAINER RING	NOTE 4	NATURAL	1	SMA5000-4-B		DRAWN	DATE	04-25-02'			
2	BODY	NOTE 1	NOTE 3	1	SMA5081-2-467							
1	SHELL	NOTE 2	NOTE 7	1	SMA5000-1-C							
						TITLE	Amphenol - Kai Jack					
						TITLE	SMA SEMI-RIGID PLUG					
						DRAWING NO.	KJ-SMA1181Z1-3G/ST50G-.141-50					
						ITEM NO.	111181AAJ42HE5F					

1 2 3 4 5 6 7 8